

**TEFCOLD<sup>®</sup>** 

## About Tefcold

Founded in 1987 by a group of people with years of experience in the refrigeration industry, the objective of Tefcold was to develop, manufacture and distribute refrigerators and freezers of high quality for the global markets.

Our mission is to support our customers, and we have done this successfully for 25 years. We see ourselves as a reliable, solid supplier who is here to stay.

We believe that the best way to innovate is to listen to and cooperate with our customers, and we constantly aim to improve our product range as well as our services in order to be the supplier of choice in our line of business.

We believe in services making our products even better, and we understand that equipment can be urgently needed. You can always expect your orders to be handled immediately and with great care by our staff, and standard equipment can be delivered from our warehouses within a few days.

For several years Tefcold has been focusing on eco-friendly equipment in order to take active part in the reduction of the global energy consumption. The energy consumption of each of our products is constantly being reduced, and the up-to-date information can always be found on our website [www.tefcold.dk](http://www.tefcold.dk) along with all other technical info, spare parts lists, manuals etc.

The “green” products in our range are marked with this logo:



We hope you will enjoy our catalogue and look forward to cooperating with you.




06  Coolers  
Bottle / Display Coolers | Can Coolers | Back Bars

74  Wine Coolers

84  Minibars

90  Freezers  
Ice Cream | Chest | Upright

134  Domestic

140  Gastroline Stainless Steel Products  
Counters | Cooling Wells | Pizza | Saladette | Sandwich | Upright | Vitrine

180  Bakery and Supermarket

192  Laboratory





## Coolers

Bottle / Display Coolers | Can Coolers | Back Bars

In the following pages you will find some of our most popular items.

The bottle coolers FS1380/SCU1375 are among our bestselling products because of their timeless design and functionality. For these models, matching freezers are available.

Most products in this section are available with canopy and are well-suited for personalisation with your brand name.

The back bar coolers presented in this section are available in many different variants, and the counter bottle coolers can be supplied with a combination of cupboards and drawers according to the customers' needs.

The elegant design of both back bar display and counter chillers makes them suitable for bars and restaurants and can easily be combined.





TEFCOLD

## » Bottle / Display Coolers

In this section you will find some of our most popular items. The glass door merchandisers FS1380/SCU1375 are among our best selling products because of their timeless design and functionality.

Most products in this section are available with canopy and are well-suited for personalisation with your brand name. Available with glass door or solid door, with or without canopy and in several different sizes, this range offers many combinations. All units are designed to work in a hot environment. For the FS/SCU series matching freezers are available.

We are happy to present a new line of bottle coolers on page 20-21 as well as a new line of display coolers on page 30-33. These models are all available both with and without canopy.

You can find our new top loaded coolers on page 46-47.

Chest Bottle Coolers can also be found in this section, page 44-45.





## » Bottle Coolers



### BC25CP

- LED light
- Fan assisted cooling
- Glass door
- 2 Fixed shelves
- Adjustable feet



#### FS60CP / 80CP

- Illuminated Canopy
- Fan assisted cooling
- Glass door
- 2 Fixed shelves
- Adjustable feet



#### FSC100

- Illuminated Canopy
- Fan assisted cooling
- Self -Closing Sliding Glass door
- 3 Adjustable shelves
- Brackets for wall-hanging
- Adjustable feet

## Technical specifications

Model	BC25CP	FS60CP	FS80CP	FSC100
Climate Class	N	N	N	N
Temperature Range, °C	0 to 10	2 to 10	2 to 10	2 to 10
Gross Volume, l	25	60	84	100
Net Volume, l	22	45	55	60
Cans, 330 ml	18	48	114	96
Cans, 500 ml	18	48	84	64
Bottles, 330 ml	-	-	66	64
Bottles, 1,5 l PET	-	-	-	-
External Dimensions, WxDxH	332x423x618	455x440x720	480x460x840	655x390x930
Internal Dimensions, WxDxH	258x270x373	395x270x440	410x380x550	560x265x635
Doors	1 hinged glass	1 hinged glass	1 hinged self closing glass	2 sliding glass
Shelves/Baskets	2	2, 395x265	2, 400x260	3, 560x210
Outer Body	Black/grey	White	White	White
Interior	Aluminium	ABS	ABS	ABS
Castors/Feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet/Wall
Lock	Y	Y	Y	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	75	160	215	220
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	26	37	43	51
Net Weight, kg	23	32,5	37,5	45,5
Noise Level dbA	44	44	42	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	N	N	N	N
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	50	80	90	115
Internal Light	LED	8 W neon	15 W Neon	15 W Neon
Canopy Light	LED	8 W Neon	15 W Neon	15 W Neon

## » Bottle Coolers



### BC85 / 145

- Interior LED/Neon light
- Curved glass door
- 3 Adjustable shelves
- Adjustable feet



### BC30

- LED light
- Fan assisted cooling
- Glass door
- 1 Fixed shelf
- 1 Adjustable shelf
- Adjustable feet



### BC60

- LED light
- Fan assisted cooling
- Glass door
- 1 Fixed shelf
- 2 Adjustable shelves
- Adjustable feet

## Technical specifications

Model	BC30	BC60	BC85	BC145	BC145 w/fan
Climate Class	N	N	N	N	N
Temperature Range, °C	2 to 10	2 to 10	0 to 10	0 to 10	2 to 10
Gross Volume, l	22	67	92	109	109
Net Volume, l	20	58	85	105	105
Cans, 330 ml	20	20	101	136	136
Cans, 500 ml	55	55	70	89	89
Bottles, 330 ml	-	-	64	76	76
Bottles, 1,5 l PET	-	-	22	27	27
External Dimensions, WxDxH	356x406x491	432x496x668	503x560x775	503x560x850	503x560x850
Internal Dimensions, WxDxH	280x271x380	356x311x557	410x415x630	410x415x710	410x415x710
Doors	1 hinged glass	1 hinged glass	1 curved glass	1 curved glass	1 curved glass
Shelves/Baskets	2	3	3	3	3
Outer Body	Black	Black	White	White	White
Interior	ABS	ABS	ABS	ABS	ABS
Castors/Feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Lock	Y	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	87	100	75	122	122
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	24,6	35,7	35	38	38
Net Weight, kg	22,2	32,5	33	36	36
Noise Level dbA	44	44	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Static	Static	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	N	N	Digital	Digital	Digital
Refrigerant	R134a	R134a	R134a	R134a	R134a
Charge, g	45	50	80	80	80
Internal Light	LED	LED	8 W neon	8 W neon	8 W neon

## » Bottle Coolers



### CEV420CP

- Illuminated canopy
- Fan assisted cooling
- Internal light
- Reversible Glass door
- 4 Adjustable shelves
- Adjustable feet





#### CEV420

- Fan assisted cooling
- Internal light
- Reversible Glass door
- 4 Adjustable shelves
- Adjustable feet



New strong handle

## Technical specifications

Model	CEV420	CEV420CP
Climate Class	N	N
Temperature Range, °C	1 to 10	1 to 10
Gross Volume, l	374	374
Net Volume, l	350	350
Cans, 330 ml	455	455
Cans, 500 ml	301	301
Bottles, 330 ml	217	217
Bottles, 0,5 l PET	217	217
External Dimensions, WxDxH	595x600x1840	595x600x1980
Internal Dimensions, WxDxH	523x462x1555	523x436x1555
Doors	1 glass	1 glass
Shelves/Baskets	4, 515x405	4, 515x405
Outer Body	White	White
Interior	ABS	ABS
Castors/Feet	2 rollers and 2 feet	2 rollers and 2 feet
Lock	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50
Input Power, W	295	295
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	84,9	90,1
Net Weight, kg	75,5	80,4
Noise Level dbA	45	45
Type of Cooling	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic
Controller	Mechanical	Mechanical
Thermometer	Y	Y
Refrigerant	R134a	R134a
Charge, g	200	200
Internal Light	15 W Neon	15 W Neon
Canopy Light	N	15 W Neon
Option: Charged with R600a		

## » Bottle Coolers



2 doors on model FS2380

### FS1380

- Fan assisted cooling
- Internal light
- Reversible Glass door
- 5 Adjustable shelves
- Adjustable feet





#### FS1280

- Fan assisted cooling
- Internal light
- Reversible Glass door
- 4 Adjustable shelves
- Adjustable feet



#### FS1220

- Fan assisted cooling
- Internal light
- Reversible Glass door
- 3 Adjustable shelves
- Adjustable feet

## Technical specifications

Model	FS1220	FS1280	FS1380	FS2380
Climate Class	N	N	N	N
Temperature Range, °C	1 to 10	1 to 10	1 to 10	1 to 10
Gross Volume, l	215	290	372	372
Net Volume, l	190	260	345	345
Cans, 330 ml	301	392	455	448
Cans, 500 ml	175	259	301	294
Bottles, 330 ml	133	175	217	210
Bottles, 0,5 l PET	133	175	217	210
External Dimensions, WxDxH	595x600x1315	595x600x1635	595x600x1840	595x600x1840
Internal Dimensions, WxDxH	470x450x887	470x450x1347	470x450x1552	470x450x1552
Doors	1 glass	1 glass	1 glass	2 glass
Shelves/Baskets	3, 490x360	4, 490x360	5, 490x360	5, 490x360
Outer Body	White	White	White	White
Interior	ABS	ABS	ABS	ABS
Castors/Feet	2 adjustable feet	2 adjustable feet	2 adjustable feet	2 adjustable feet
Lock	Y	Y	Y	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	229	266	295	295
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	64,4	79,3	84,9	84,9
Net Weight, kg	56,3	70	75,5	75,5
Noise Level dbA	45	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	90	180	200	200
Internal Light	15 W Neon	15 W Neon	15 W Neon	15 W Neon
Option: Charged with R600a				

# » Bottle Coolers



2 doors on model FSC2380

## FSC1380

- Illuminated canopy
- Fan assisted cooling
- Internal light
- Reversible Glass door
- 5 Adjustable shelves
- Adjustable feet



**FSC1220**

- Illuminated canopy
- Fan assisted cooling
- Internal light
- Reversible Glass door
- 3 Adjustable shelves
- Adjustable feet



**FSC1280**

- Illuminated canopy
- Fan assisted cooling
- Internal light
- Reversible Glass door
- 4 Adjustable shelves
- Adjustable feet

## Technical specifications

Model	FSC1220	FSC1280	FSC1380	FSC2380
Climate Class	N	N	N	N
Temperature Range, °C	1 to 10	1 to 10	1 to 10	1 to 10
Gross Volume, l	215	290	372	372
Net Volume, l	190	260	345	345
Cans, 330 ml	301	392	455	448
Cans, 500 ml	175	259	301	294
Bottles, 330 ml	133	175	217	210
Bottles, 0,5 l PET	133	175	217	210
External Dimensions, WxDxH	595x600x1455	595x600x1775	595x600x1980	595x600x1980
Internal Dimensions, WxDxH		470x450x1347	470x450x1552	470x450x1552
Doors	1 glass	1 glass	1 glass	1 glass
Shelves/Baskets	3, 490x360	4, 490x360	5, 490x360	5, 490x360
Outer Body	White	White	White	White
Interior	ABS	ABS	ABS	ABS
Castors/Feet	2 adjustable feet	2 adjustable feet	2 adjustable feet	2 adjustable feet
Lock	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	230	266	295	295
Energy Consumption, kWh/24h	<a href="http://www.tefcold.dk">See www.tefcold.dk</a>	<a href="http://www.tefcold.dk">See www.tefcold.dk</a>	<a href="http://www.tefcold.dk">See www.tefcold.dk</a>	<a href="http://www.tefcold.dk">See www.tefcold.dk</a>
Gross Weight, kg	71,4	83,3	90,1	90,1
Net Weight, kg	62,5	74	80,4	80,4
Noise Level dbA	45	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	90	180	200	200
Internal Light	15 W Neon	15 W Neon	15 W Neon	15 W Neon
Canopy Light	15 W Neon	15 W Neon	15 W Neon	15 W Neon
Option: Charged with R600a				

## » Bottle Coolers



### GBC 375CP

- LED illuminated canopy
- Fan assisted cooling
- Internal LED light
- Reversible glass door
- Strong handle
- 5 Adjustable shelves
- Adjustable feet

Available medio 2012



**GBC 375**

- Fan assisted cooling
- Internal LED light
- Reversible glass door
- Strong handle
- 5 Adjustable shelves
- Adjustable feet



**GBC 450CP**

- LED illuminated canopy
- Fan assisted cooling
- Internal LED light
- Reversible glass door
- Strong handle
- 5 Adjustable shelves
- Adjustable feet

## Technical specifications

	GBC 375	GBC 375CP	GBC 450CP
Climate Class	N	N	N
Temperature Range, °C	1 to 10	1 to 10	1 to 10
Gross Volume, l	372	372	438
Net Volume, l	347	347	374
Cans, 330 ml	455	455	720
Cans, 500 ml	301	301	486
Bottles, 330 ml	217	217	360
Bottles, 0,5 l PET	217	217	360
External Dimensions, WxDxH	595x600x1840	595x600x1980	680x655x2090
Internal Dimensions, WxDxH	470x450x1552	470x450x1552	585x495x1515
Doors	1 glass	1 glass	1 glass
Shelves/Baskets	5	5	5
Outer Body	White	White	White
Interior	ABS	ABS	ABS
Castors/Feet	2 adjustable feet	2 adjustable feet	2 adjustable feet
Lock	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	-	-	-
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	85	91	105
Net Weight, kg	76	82	97
Noise Level dbA	40	40	49
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y
Refrigerant	R600a	R600a	R600a
Charge, g	-	-	-
Internal Light	LED	LED	LED
Canopy Light	-	LED	LED

## » Bottle Coolers



### FSC1380CURVED

- Illuminated canopy
- Fan assisted cooling
- Internal light
- Curved Glass door
- Integrated handle
- 5 Adjustable shelves
- Adjustable feet



### FS1450

- Fan assisted cooling
- Internal light
- Glass door
- 5 Adjustable shelves
- Adjustable feet



### SCU1450CP

- Illuminated canopy
- Fan assisted cooling
- Internal light
- Glass door
- 5 Adjustable shelves
- Adjustable feet

## Technical specifications

Model	FSC1380CURV	FS1450	FSC1450	SCU1450CP
Climate Class	N	N	N	N
Temperature Range, °C	1 to 10	1 to 10	1 to 10	1 to 10
Gross Volume, l	380	420	438	438
Net Volume, l	347	353	374	374
Cans, 330 ml	455	-	720	720
Cans, 500 ml	301	-	486	486
Bottles, 330 ml	217	-	360	360
Bottles, 0,5 l PET	217	-	360	360
External Dimensions, WxDxH	595x625x1980	680x605x2010	680x655x2090	680x655x2090
Internal Dimensions, WxDxH	470x450x1552	570x500x1685	585x495x1515	585x495x1515
Doors	1 glass	1 glass	1 glass	1 glass
Shelves/Baskets	5, 495x448	5, 560x410	5, 574x405	5, 574x405
Outer Body	White	White	White	White
Interior	ABS	Powder coated	ABS	ABS
Castors/Feet	2 adjustable feet	2 adjustable feet	2 adjustable feet	2 adjustable feet
Lock	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	352	360	350	350
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	98	105	105	105
Net Weight, kg	90	97	97	97
Noise Level dbA	45	49	49	49
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	200	260	200	200
Internal Light	15 W Neon	36 W Neon	36 W Neon	36 W Neon
Canopy Light	15 W Neon	15 W Neon	18 W Neon	18 W Neon
Option: Charged with R600a				

## » Bottle Coolers



2 doors on SCU2375

### SCU1375

- Fan assisted cooling
- Internal light
- Reversible Glass door
- 5 Adjustable shelves
- Adjustable feet





**SCU1220**

- Fan assisted cooling
- Internal light
- Reversible Glass door
- 3 Adjustable shelves
- Adjustable feet



**SCU1280**

- Fan assisted cooling
- Internal light
- Reversible Glass door
- 4 Adjustable shelves
- Adjustable feet

## Technical specifications

Model	SCU1220	SCU1280	SCU1375	SCU2375
Climate Class	N	N	N	N
Temperature Range, °C	1 to 10	1 to 10	1 to 10	1 to 10
Gross Volume, l	215	290	372	372
Net Volume, l	190	260	345	345
Cans, 330 ml	301	392	455	448
Cans, 500 ml	175	259	301	294
Bottles, 330 ml	133	175	217	210
Bottles, 0,5 l PET	133	175	217	210
External Dimensions, WxDxH	595x600x1315	595x600x1635	595x600x1840	595x600x1840
Internal Dimensions, WxDxH	470x450x1025	470x450x1347	470x450x1552	470x450x1552
Doors	1 glass	1 glass	1 glass	2 glass
Shelves/Baskets	3, 490x360	4, 490x360	5, 490x360	5, 490x360
Outer Body	White	White	White	White
Interior	ABS	ABS	ABS	ABS
Castors/Feet	2 adjustable feet	2 adjustable feet	2 adjustable feet	2 adjustable feet
Lock	Y	Y	Y	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	229	266	295	295
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	64,4	79,3	84,9	84,9
Net Weight, kg	56,3	70	75,5	75,5
Noise Level dbA	45	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	90	180	200	200
Internal Light	15 W Neon	15 W Neon	15 W Neon	15 W Neon
Option: Charged with R600a				

## » Bottle Coolers



2 doors on SCU2375

### SCU1375CP

- Illuminated canopy
- Fan assisted cooling
- Internal light
- Reversible Glass door
- 5 Adjustable shelves
- Adjustable feet



#### SCU1220CP

- Illuminated canopy
- Fan assisted cooling
- Internal light
- Reversible Glass door
- 3 Adjustable shelves
- Adjustable feet



#### SCU1280CP

- Illuminated canopy
- Fan assisted cooling
- Internal light
- Reversible Glass door
- 4 Adjustable shelves
- Adjustable feet

## Technical specifications

Model	SCU1220CP	SCU1280CP	SCU1375CP	SCU2375CP
Climate Class	N	N	N	N
Temperature Range, °C	1 to 10	1 to 10	1 to 10	1 to 10
Gross Volume, l	215	290	372	372
Net Volume, l	190	260	345	345
Cans, 330 ml	301	392	455	448
Cans, 500 ml	175	259	301	294
Bottles, 330 ml	133	175	217	210
Bottles, 0,5 l PET	133	175	217	210
External Dimensions, WxDxH	595x600x1455	595x600x1775	595x600x1980	595x600x1980
Internal Dimensions, WxDxH	470x450x1025	470x450x1347	470x450x1552	470x450x1552
Doors	1 glass	1 glass	1 glass	1 glass
Shelves/Baskets	3, 490x360	4, 490x360	5, 490x360	5, 490x360
Outer Body	White	White	White	White
Interior	ABS	ABS	ABS	ABS
Castors/Feet	2 adjustable feet	2 adjustable feet	2 adjustable feet	2 adjustable feet
Lock	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	230	266	295	295
Energy Consumption, kWh/24h	<a href="http://www.tefcold.dk">See www.tefcold.dk</a>	<a href="http://www.tefcold.dk">See www.tefcold.dk</a>	<a href="http://www.tefcold.dk">See www.tefcold.dk</a>	<a href="http://www.tefcold.dk">See www.tefcold.dk</a>
Gross Weight, kg	71,4	83,3	90,1	90,1
Net Weight, kg	62,5	74	80,4	80,4
Noise Level dbA	45	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	90	180	200	200
Internal Light	15 W Neon	15 W Neon	15 W Neon	15 W Neon
Canopy Light	15 W Neon	15 W Neon	15 W Neon	15 W Neon
Option: Charged with R600a				

## » Bottle Coolers



### FSC1450 Sub Zero

- Jumbo display thermometer
- Illuminated canopy
- Fan assisted cooling
- Internal light
- 5 Adjustable shelves
- Adjustable feet



#### FS80CP Sub Zero

- Jumbo display thermometer
- Illuminated canopy
- Fan assisted cooling
- Self -Closing heated glass door
- 2 Adjustable shelves
- Adjustable feet

## Technical specifications

Model	FS80CP/SUB ZERO	FSC1380/SUB ZERO	FSC1450/SUB ZERO
Climate Class	N	N	N
Temperature Range, °C	-2,5 to 5	-2,5 to 5	-2,5 to 5
Gross Volume, l	84	372	438
Net Volume, l	55	345	374
Cans, 330 ml	60	364	480
Cans, 500 ml	40	196	324
Bottles, 330 ml	48	161	272
Bottles, 1,5 l PET	-	-	-
External Dimensions, WxDxH	480x460x840	595x600x1980	680x655x2090
Internal Dimensions, WxDxH	-	470x450x1552	585x495x1515
Doors	1 hinged self-closing glass	1 glass	1 glass
Shelves/Baskets	2, 400x260	5, 490x360	5, 574x405
Outer Body	White	White	White
Interior	ABS	ABS	ABS
Castors/Feet	4 adjustable feet	2 rollers and 2 feet	2 adjustable feet
Lock	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	255	295	427
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	43	90,1	105
Net Weight, kg	37,5	80,4	97
Noise Level dbA	42	45	49
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Electronic	Electronic	Electronic
Thermometer	Y	Y	Y
Refrigerant	R134a	R134a	R134a
Charge, g	90	200	200
Internal Light	15 W Neon	15 W Neon	36 W Neon
Canopy Light	15 W Neon	15 W Neon	18 W Neon

## » Display Coolers



### FS1200S

- Internal vertically light
- Ventilated cooling
- 2 sliding glass doors
- 5 Adjustable shelves
- Adjustable feet



#### FSC1000S

- Illuminated canopy
- Internal vertically light
- Ventilated cooling
- 2 sliding glass doors
- 1 Bottom shelf
- 4 Adjustable shelves
- Adjustable feet



#### FSC1200S

- Illuminated canopy
- Internal vertically light
- Ventilated cooling
- 2 sliding glass doors
- 1 Bottom shelf
- 4 Adjustable shelves
- Adjustable feet

## Technical specifications

Model	FS1000S	FS1200S	FSC1000S	FSC1200S
Climate Class	N	N	N	N
Temperature Range, °C	1 to 10	1 to 10	1 to 10	1 to 10
Gross Volume, l	800	980	771	945
Net Volume, l	720	882	691	847
Cans, 330 ml	1196	1472	1144	1408
Cans, 500 ml	754	928	728	896
Bottles, 330 ml	546	672	520	640
Bottles, 0,5 l PET	546	672	520	640
External Dimensions, WxDxH	1000x735x2010	1200x735x2010	1000x740x2010	1200x740x2010
Internal Dimensions, WxDxH	890x578x1555	1090x578x1555	890x572x1533	1090x572x1533
Doors	2 sliding glass	2 sliding glass	2 sliding glass	2 sliding glass
Shelves/Baskets	5, 870x475	5, 1070x475	5	5
Outer Body	White	White	White	White
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	4 rollers	4 rollers	4 rollers	4 rollers
Lock	N	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	670	740	700	850
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	176	189	175	188,5
Net Weight, kg	163	174	162	174
Noise Level dbA	48	48	48	48
Type of Cooling	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	450	460	450	450
Internal Light	36 W Neon	36 W Neon	36 W Neon	36 W Neon
Canopy Light	N	N	30 W Neon	30 W Neon

## » Display Coolers



### FSC1200H

- Internal vertically light
- Ventilated cooling
- 2 hinged glass doors
- 1 Bottom shelf
- 4 Adjustable shelves
- Adjustable feet





#### FSC1200H

- Illuminated canopy
- Internal vertically light
- Ventilated cooling
- 2 hinged glass doors
- 1 Bottom shelf
- 4 Adjustable shelves
- Adjustable feet



#### FSC1950S

- Illuminated canopy
- Internal vertically light
- Ventilated cooling
- 2 sliding glass doors
- 1 Bottom shelf
- 4 Adjustable shelves
- Adjustable feet

## Technical specifications

Model	FSC1000H	FSC1200H	FSC1950H	FSC1950S
Climate Class	N	N	N	N
Temperature Range, °C	1 to 10	1 to 10	1 to 10	1 to 10
Gross Volume, l	796	970	1013	988
Net Volume, l	696	852	871	866
Cans, 330 ml	1287	1584	1020	1020
Cans, 500 ml	819	1008	720	720
Bottles, 330 ml	585	720	560	560
Bottles, 0,5 l PET	585	720	560	560
External Dimensions, WxDxH	1000x790x2010	1200x790x2010	1110x825x2025	1110x825x2025
Internal Dimensions, WxDxH	890x670x1533	1090x670x1533	1000x645x1530	1000x645x1530
Doors	2 hinged glass	2 hinged glass	2 hinged glass	2 sliding glass
Shelves/Baskets	5	5	5	5
Outer Body	White	White	White	White
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	4 rollers	4 rollers	4 rollers	4 rollers
Lock	N	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	700	850	817	817
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	175	188,5	195	195
Net Weight, kg	162	174	175	175
Noise Level dbA	48	48	55	55
Type of Cooling	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	450	450	900	900
Internal Light	36 W Neon	36 W Neon	30 W Neon	30 W Neon
Canopy Light	30 W Neon	30 W Neon	30 W Neon	30 W Neon

## » Display Coolers



### SLDG800

- Illuminated canopy
- Internal vertically light
- Fan assisted cooling
- 2 sliding glass doors
- 5 Adjustable shelves behind each door
- Adjustable feet



### SLDG600

- Illuminated canopy
- Internal vertically light
- Fan assisted cooling
- 2 sliding glass doors
- 5 Adjustable shelves behind each door
- Adjustable feet



### SLDG1000

- Illuminated canopy
- Internal vertically light
- Fan assisted cooling
- 2 sliding glass doors
- 5 Adjustable shelves behind each door
- Adjustable feet

## Technical specifications

Model	SLDG600	SLDG725	SLDG800	SLDG1000
Climate Class	N	N	N	N
Temperature Range, °C	2 to 12	2 to 12	2 to 12	2 to 12
Gross Volume, l	593	720	786	937
Net Volume, l	576	673	776	914
Cans, 330 ml	560	655	752	848
Cans, 500 ml	-	-	-	-
Bottles, 330 ml	360	360	476	612
Bottles, 0,5 l PET	360	360	476	612
External Dimensions, WxDxH	890x630x2035	1000x630x2035	1140x630x2035	1360x630x2035
Internal Dimensions, WxDxH	800x500x1440	910x500x1440	1050x500x1440	1270x500x1440
Doors	2 sliding glass	2 sliding glass	2 sliding glass	2 sliding glass
Shelves/Baskets	10, 470x378	10, 470x435	10, 490x485	10, 625x485
Outer Body	White	White	White	White
Interior	Powder coated	Powder coated	Powder coated	Powder coated
Castors/Feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Lock	N, Option	N, Option	N, Option	N, Option
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	590	590	590	1000
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	163	202	203	234
Net Weight, kg	155	194	195	225
Noise Level dbA	50	50	50	50
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	320	325	360	380
Internal Light	36 W Neon	36 W Neon	36 W Neon	36 W Neon
Canopy Light	18 W Neon	18 W Neon	30 W Neon	30 W Neon

## » Bottle Coolers



### SD1380

- Fan assisted cooling
- Reversible Solid door
- 5 Adjustable shelves
- Adjustable feet



**SD1220**

- Fan assisted cooling
- Reversible Solid door
- 3 Adjustable shelves
- Adjustable feet



**SD1280**

- Fan assisted cooling
- Reversible Solid door
- 4 Adjustable shelves
- Adjustable feet

## Technical specifications

Model	SD1220	SD1280	SD1380
Climate Class	N	N	N
Temperature Range, °C	2 to 12	2 to 12	2 to 12
Gross Volume, l	215	290	372
Net Volume, l	190	260	345
Cans, 330 ml	301	392	455
Cans, 500 ml	175	259	301
Bottles, 330 ml	133	175	217
Bottles, 0,5 l PET	133	175	217
External Dimensions, WxDxH	595x600x1315	595x600x1635	595x600x1840
Internal Dimensions, WxDxH	470x440x1020	470x440x1340	470x440x1545
Doors	1 solid	1 solid	1 solid
Shelves/Baskets	3, 490x360	4, 490x360	5, 490x360
Outer Body	White	White	White
Interior	ABS	ABS	ABS
Castors/Feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet
Lock	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	175	185	215
Energy Consumption, kWh/24h	<a href="http://www.tefcold.dk">See www.tefcold.dk</a>	<a href="http://www.tefcold.dk">See www.tefcold.dk</a>	<a href="http://www.tefcold.dk">See www.tefcold.dk</a>
Gross Weight, kg	74	85	94
Net Weight, kg	63	78	86
Noise Level dbA	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y
Refrigerant	R134a	R134a	R134a
Charge, g	90	180	200
Internal Light	N	N	N
Option: Charged with R600a			

## » Bottle Coolers



### SDU1220

- Fan assisted cooling
- Reversible Solid door
- 3 Adjustable shelves
- Adjustable feet



#### SDU1280

- Fan assisted cooling
- Reversible Solid door
- 4 Adjustable shelves
- Adjustable feet



#### SDU1375

- Fan assisted cooling
- Reversible Solid door
- 5 Adjustable shelves
- Adjustable feet

## Technical specifications

Model	SDU1220	SDU1280	SDU1375
Climate Class	N	N	N
Temperature Range, °C	2 to 12	2 to 12	2 to 12
Gross Volume, l	215	290	372
Net Volume, l	190	260	345
Cans, 330 ml	301	392	455
Cans, 500 ml	175	259	301
Bottles, 330 ml	133	175	217
Bottles, 0,5 l PET	133	175	217
External Dimensions, WxDxH	595x640x1315	595x640x1635	595x640x1840
Internal Dimensions, WxDxH	470x440x1020	470x440x1340	470x440x1545
Doors	1 solid	1 solid	1 solid
Shelves/Baskets	3, 490x360	4, 490x360	5, 490x360
Outer Body	White	White	White
Interior	ABS	ABS	ABS
Castors/Feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet
Lock	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	185	215	175
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	85	94	74
Net Weight, kg	78	86	63
Noise Level dbA	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y
Refrigerant	R134a	R134a	R134a
Charge, g	90	180	200
Internal Light	N	N	N
Option: Charged with R600a			

# » Upright Coolers



Fan assisted cooling



## UR200S

- Stainless steel cabinet
- White inner liner
- Lock fitted as standard
- Reversible door
- 3 Adjustable shelves
- Adjustable feet at front, rollers at back
- Fan assisted cooling
- Automatic defrost
- Digital thermometer
- Option: Wheels or adjustable legs





### UR400

- White cabinet
- White inner liner
- Lock fitted as standard
- Reversible door
- 4 Adjustable shelves
- Adjustable feet at front, rollers at back
- Fan assisted cooling
- Automatic defrost
- Digital thermometer
- Option: Wheels or adjustable legs



### UR600

- White cabinet
- White inner liner
- Lock fitted as standard
- Reversible door
- 4 Adjustable shelves GN2/1
- Adjustable feet at front, rollers at back
- Fan assisted cooling
- Automatic defrost
- Digital thermometer
- Option: Wheels or adjustable legs

## Technical specifications

Model	UR200	UR200S	UR400	UR400S	UR600	UR600S
Climate Class	N	N	N	N	N	N
Temperature Range, °C	0 to 10	0 to 10	0 to 10	0 to 10	0 to 10	0 to 10
Gross Volume, l	200	200	400	400	600	600
Net Volume, l	130	130	350	350	570	570
Cans, 330 ml	-	-	-	-	-	-
Cans, 500 ml	-	-	-	-	-	-
Bottles, 330 ml	-	-	-	-	-	-
Bottles, 1,5 l PET	-	-	-	-	-	-
External Dimensions, WxDxH	600x600x850	600x600x850	600x600x1850	600x600x1850	770x750x1900	770x750x1900
Internal Dimensions, WxDxH	-	-	-	-	-	-
Doors	1 solid White	1 solid SS430	1 solid White	1 solid SS430	1 solid White	1 solid SS430
Shelves/Baskets	2, 502x440 and 1, 502x211	2, 502x440 and 1, 502x211	3, 502x440 and 1, 502x211	3, 502x440 and 1, 502x211	3, GN2/1 and 1, 650x305	3, GN2/1 and 1, 650x305
Outer Body	White	SS430	White	SS430	White	SS430
Interior	ABS	ABS	ABS	ABS	ABS	ABS
Castors/Feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet
Lock	Y	Y	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	150	150	185	185	200	200
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	49	49	74	74	97	97
Net Weight, kg	44	44	69	69	90	90
Noise Level dbA	40	40	40	40	40	40
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a	R134a	R134a
Charge, g	75	75	170	170	210	210
Internal Light	N	N	N	N	N	N

## » Upright Coolers



### RK400G



- Stainless steel cabinet
- Grey inner liner
- Lock fitted as standard
- Reversible door
- 5 Adjustable shelves
- Adjustable legs
- Fan assisted cooling
- Automatic defrost
- Digital thermometer



### RK400

- Stainless steel cabinet
- Grey inner liner
- Lock fitted as standard
- Reversible door
- 5 Adjustable shelves
- Adjustable legs
- Fan assisted cooling
- Automatic defrost
- Digital thermometer

## Technical specifications

Model	RK400	RK400G
Climate Class	N	N
Temperature Range, °C	2 to 12	2 to 12
Gross Volume, l	372	372
Net Volume, l	345	345
Cans, 330 ml	455	455
Cans, 500 ml	301	301
Bottles, 330 ml	217	217
Bottles, 0,5 l PET	217	217
External Dimensions, WxDxH	595x640x1920	595x640x1920
Internal Dimensions, WxDxH	470x440x1545	470x440x1545
Doors	1 solid SS304	1 glass
Shelves/Baskets	5, 490x360	5, 490x360
Outer Body	SS430	SS430
Interior	ABS	ABS
Castors/Feet	2 adjustable feet	2 adjustable feet
Lock	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50
Input Power, W	295	295
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	86	88
Net Weight, kg	76,5	78,5
Noise Level dbA	45	45
Type of Cooling	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic
Controller	Mechanical	Mechanical
Thermometer	Y	Y
Refrigerant	R134a	R134a
Charge, g	200	200
Internal Light	N	15 W Neon
Option: Charged with R600a		

## » Chest Bottle Coolers



### USS300YSC Chest Bottle Cooler

- Sliding glass lids
- Lock
- Double wheels
- Suitable for branding with stickers
- Options: Available with copper evaporator



**USS300SD Chest Bottle Cooler**

- Solid, sliding lids
- Integrated handle
- Strong wheels
- Suitable for branding with stickers
- Options: Available with copper evaporator



**USS300Y**

- Flip-Flop solid lids
- Inner liner of stucco aluminium
- 4 castors included
- Options: Available with copper evaporator

## Technical specifications

Model	USS300SD	USS300Y	USS300YSC
Climate Class	N	T	N
Temperature Range, °C	1 to 10	-6 to 10	-6 to 10
Gross Volume, l	296	289	296
Net Volume, l	261	283	261
Cans, 330 ml	400	413	400
Cans, 500 ml	245	245	245
Bottles, 330 ml	245	245	245
Bottles, 1,5 l PET	-	-	-
External Dimensions, WxDxH	1020x640x860	1060x670x825	1020x640x860
Internal Dimensions, WxDxH	890x510x663	890x510x682	890x510x663
Doors	2 sliding solid	Flip-Flop solid	2 sliding glass
Shelves/Baskets	-	-	-
Outer Body	White	White	White
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	4 wheels	4 wheels	4 wheels
Lock	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	240	250	240
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	60	63	60
Net Weight, kg	53	57	53
Noise Level dbA	42	42	42
Type of Cooling	Static	Static	Static
Type of Defrost	Manual	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical
Thermometer	N	N	N
Refrigerant	R134a	R134a	R134a
Charge, g	260	260	260
Internal Light	N	N	N

## » Top Bottle Coolers



### TLB 150SS

- Top loaded cabinet
- Removable lids for ease of loading
- Stainless steel 304 exterior
- Stainless steel 304 interior
- Fan assisted cooling
- Automatic defrost
- 2 Lids
- Adjustable legs
- Digital temperature display
- Option: Black outer body



Sliding lids



SS304 interior



Dividers included



### TLB 200

- Top loaded cabinet
- Removable lids for ease of loading
- Stainless steel 304 exterior
- Stainless steel 304 interior
- Fan assisted cooling
- Automatic defrost
- 3 Lids
- Adjustable legs
- Digital temperature display
- Option: Black outer body

## Technical specifications

Model	TLB150SS	TLB200SS	TLB250SS
Climate Class	N	N	N
Temperature Range, °C	2 to 6	2 to 6	2 to 6
Gross Volume, l	460	645	830
Net Volume, l	440	615	790
External Dimensions, WxDxH	1500x565x850	2000x565x850	2500x565x850
Internal Dimensions, WxDxH	-	-	-
Doors	2 sliding lids	3 sliding lids	4 sliding lids
Dividers	2	3	4
Outer Body	SS304	SS304	SS304
Interior	SS304	SS304	SS304
Castors/Feet	4 adjustable legs	4 adjustable legs	4 adjustable legs
Lock	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	250	298	320
Energy Consumption, kWh/24h	<a href="http://www.tefcold.dk">See www.tefcold.dk</a>	<a href="http://www.tefcold.dk">See www.tefcold.dk</a>	<a href="http://www.tefcold.dk">See www.tefcold.dk</a>
Gross Weight, kg	107	118	150
Net Weight, kg	86	98	130
Noise Level dbA	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Electronic	Electronic	Electronic
Thermometer	Y	Y	Y
Refrigerant	R134a	R134a	R134a
Charge, g	350	-	-
Internal Light	N	N	N

## » Can Coolers

For increasing the number of impulse sales, we offer can coolers as well as impulse chillers well suited for personalisation with brand image and logo, with a stylish shape that will certainly attract customers.

These mobile products are suitable for shops as well as parties.

The internal fan ensures a fast and even cooling of the beverage and the internal baskets make it easy to load and unload them.





## » Can Coolers



### VOC75

- Illuminated canopy
- Internal fan
- Internal baskets
- Fast pull-down of temperature
- Well suited for graphics
- 4 strong castors



#### VOC100

- Designed for canned drinks
- Illuminated light-board
- Internal fan
- Fast pull-down of temperature
- Well suited for graphics
- 7 sliding shoes



#### VOC70

- Illuminated canopy
- Internal fan
- Internal baskets
- Fast pull-down of temperature
- Well suited for graphics
- 4 strong castors

## Technical specifications

Model	VOC70	VOC75	VOC100
Climate Class, N,SN,ST,T	N	N	N
Temperature Range, °C	2 to 12	2 to 12	2 to 12
Gross Volume, l	65	65	110
Net Volume, l	57	57	103
Cans, 330 ml	78	78	-
Cans, 500 ml	36	36	-
Bottles, 330 ml	-	-	-
Bottles, 1,5 l PET	-	-	-
External Dimensions, WxDxH	Ø570x980	Ø570x980	660x460x970
Internal Dimensions, WxDxH	Ø470x310	Ø470x310	520x320x570
Doors	N	N	N
Shelves/Baskets	N	N	N
Outer Body	White	White	RAL9006
Interior	Powder coated	Powder coated	SAC
Castors/Feet	4 castors	4 castors	7 sliding shoes
Lock	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	211	211	140
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	37	37	31
Net Weight, kg	32	32	29
Noise Level dbA	42	42	42
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Electronic
Thermometer	N	N	Y
Refrigerant	R134a	R134a	R134a
Charge, g	100	100	151
Internal Light	N	N	N
Canopy Light	8 W neon	8 W neon	LED

## » Can Coolers



Also available in white



Internal fan and basket

### CC77 w/Fan BLACK

- Designed for canned drinks
- Internal fan
- Fast pull-down of temperature
- Internal basket
- Flip-flop lid
- Well suited for graphics
- 4 strong castors



#### CC45 w/Fan

- Designed for canned drinks
- Internal fan
- Fast pull-down of temperature
- Internal basket
- Flip-flop lid
- Well suited for graphics
- 4 strong castors



#### CC55 w/Fan

- Designed for energy drinks
- Internal fan
- Fast pull-down of temperature
- Internal baskets
- Flip-flop lid
- Well suited for graphics
- 4 strong castors

## Technical specifications

Model	CC45 w/Fan	CC55 w/Fan	CC77 w/Fan	CC77 w/Fan BLACK
Climate Class	N	N	N	N
Temperature Range, °C	0 to 8	0 to 8	0 to 8	0 to 8
Gross Volume, l	53	80	80	80
Net Volume, l	50	78	77	77
Cans, 330 ml	44	84	78	78
Cans, 500 ml	-	42	36	36
Bottles, 330 ml	-	-	-	-
Bottles, 1,5 l PET	-	-	-	-
External Dimensions, WxDxH	Ø457x830	Ø470x1120	Ø567x830	Ø567x830
Internal Dimensions, WxDxH	Ø375x470	Ø380x655	Ø450x475	Ø450x475
Doors	Acrylic flip	Acrylic flip	Acrylic flip	Acrylic flip
Shelves/Baskets	1 basket	2 baskets	1 basket	1 basket
Outer Body	Black	White	White	Black
Interior	Powder coated	Powder coated	Powder coated	Powder coated
Castors/Feet	4 castors, 1 lockable	4 castors, 1 lockable	4 castors, 1 lockable	4 castors, 1 lockable
Lock	N	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	103	112	112	112
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	25	32,5	34	34
Net Weight, kg	22	27,5	29	29
Noise Level dbA	45	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	N	N	N	N
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	60	80	95	95
Internal Light	N	N	N	N

## » Back Bars / Counter Chillers

The Back Bar Chillers presented in this section are available in different heights and with 1, 2 or 3 doors (solid or glass).

The BA20 and BA30 with glass door can be supplied with either hinged or sliding doors.

They are now available with black or stainless steel exterior. If you choose the black version, we now offer a new variant with aluminium door frame.

The Counter Bottle Coolers can be supplied with a combination of cupboards and drawers according to the customers needs.

The elegant design of both back bar display and counter chillers makes them suitable for bars and restaurants and can easily be combined.

Stainless steel mirror polished interior can be supplied for all BA and CBC models.



## » Back Bars



### BA10UF 'Glassfroster'

- Interior LED light
- Fan assisted cooling
- Aluminium door frame
- Double glazed door
- 2 Beer glass shelves
- Adjustable feet
- Option: LED illuminated logos





#### BA10HA

- Interior LED light
- Fan assisted cooling
- Aluminium door frame
- Double glazed door
- 2 Adjustable shelves
- Adjustable feet



#### BA20SS

- Stainless steel 430 exterior
- Interior LED light
- Fan assisted cooling
- Double glazed doors
- 4 Adjustable shelves
- Adjustable feet

## Technical specifications

Model	BA10UF	BA10HA	BA20SS
Climate Class	N	N	N
Temperature Range, °C	-22 to -14	2 to 10	2 to 10
Gross Volume, l	124	124	196
Net Volume, l	118	118	188
Cans, 330 ml	-	161	240
Cans, 500 ml	-	112	168
Bottles, 330 ml	-	96	156
Bottles, 1,5 l PET	-	-	-
External Dimensions, WxDxH	600x520x900	600x520x900	900x515x900
Internal Dimensions, WxDxH	508x355x732	508x355x732	805x345x730
Doors	1 hinged glass	1 hinged glass	2 sliding glass
Shelves/Baskets	2, 496x350	2, 496x350	4, 330x395
Outer Body	Black	Black	SS430
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Lock	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	310	210	230
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	49	49	67,4
Net Weight, kg	47	47	65,4
Noise Level dbA	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical
Thermometer	N	N	N
Refrigerant	R134a	R134a	R134a
Charge, g	-	76	140
Internal Light	LED	LED	LED
Option: Charged with R600a			

## » Back Bars



### BA5H

- Interior LED light
- Fan assisted cooling
- Double glazed door
- 2 Adjustable shelves
- Adjustable feet



**BA15H**

- Interior LED light
- Fan assisted cooling
- Double glazed door
- 2 Adjustable shelves
- Adjustable feet



**BA25H**

- Interior LED light
- Fan assisted cooling
- Double glazed doors
- 2 Adjustable shelves
- Adjustable feet

## Technical specifications

Model	BA5H	BA15H	BA25H	BA25S
Climate Class	N	N	N	N
Temperature Range, °C	2 to 10	2 to 10	2 to 10	2 to 10
Gross Volume, l	100	122	191	191
Net Volume, l	94	116	183	183
Cans, 330 ml	138	161	270	240
Cans, 500 ml	96	112	188	168
Bottles, 330 ml	-	-	-	-
Bottles, 1,5 l PET	-	-	-	-
External Dimensions, WxDxH	500x520x870	600x520x870	900x520x870	900x515x870
Internal Dimensions, WxDxH	410x350x720	510x350x720	810x350x720	810x350x720
Doors	1 hinged glass	1 hinged glass	2 hinged glass	2 sliding glass
Shelves/Baskets	2, 398x335	2, 498x335	4, 330x395	4, 330x395
Outer Body	Black	Black	Black	Black
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Lock	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	210	210	230	230
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	46	48	66,4	66,4
Net Weight, kg	44	46	64,4	64,4
Noise Level dbA	45	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	N	N	N	N
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	76	76	140	140
Internal Light	LED	LED	LED	LED
Option: Charged with R600a				

## » Back Bars



### BA20S

- Interior LED light
- Fan assisted cooling
- Double glazed doors
- 4 Adjustable shelves
- Adjustable feet



**BA30S-2**


- Interior LED light
- Fan assisted cooling
- 2 Double glazed doors
- 2 Adjustable shelves behind each door
- Door holders for easier loading of cabinet
- Adjustable feet



**BA30S-3**

- Interior LED light
- Fan assisted cooling
- 3 Double glazed doors
- 2 Adjustable shelves behind each door
- Door holders for easier loading of cabinet
- Adjustable feet

## Technical specifications

Model	BA20S	BA30S-2	BA30S-3
Climate Class	N	N	N
Temperature Range, °C	2 to 10	2 to 10	2 to 10
Gross Volume, l	196	328	328
Net Volume, l	188	320	320
Cans, 330 ml	240	380	380
Cans, 500 ml	168	266	266
Bottles, 330 ml	156	240	240
Bottles, 1,5 l PET	-	-	-
External Dimensions, WxDxH	900x515x900	1355x515x900	1355x515x900
Internal Dimensions, WxDxH	805x345x730	1257x345x730	1257x345x730
Doors	2 sliding glass	2 sliding glass	3 sliding glass
Shelves/Baskets	4, 330x395	4, 405x365	6, 405x365
Outer Body	Black	Black	Black
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Lock	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	230	260	260
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	67,4	94	95
Net Weight, kg	65,4	91	92
Noise Level dbA	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical
Thermometer	N	N	N
Refrigerant	R134a	R134a	R134a
Charge, g	140	186	186
Internal Light	LED	LED	LED
Option: Charged with R600a			

## » Back Bars



### BA10H

- Interior LED light
- Fan assisted cooling
- Double glazed door
- 2 Adjustable shelves
- Adjustable feet



#### BA20H

- Interior LED light
- Fan assisted cooling
- Double glazed doors
- 4 Adjustable shelves
- Adjustable feet



#### BA30H

- Interior LED light
- Fan assisted cooling
- 3 Double glazed doors
- 2 Adjustable shelves behind each door
- Adjustable feet

## Technical specifications

Model	BA10H	BA20H	BA30H
Climate Class	N	N	N
Temperature Range, °C	2 to 10	2 to 10	2 to 10
Gross Volume, l	124	196	328
Net Volume, l	118	188	320
Cans, 330 ml	161	270	425
Cans, 500 ml	112	188	296
Bottles, 330 ml	96	156	240
Bottles, 1,5 l PET	-	-	-
External Dimensions, WxDxH	600x520x900	900x520x900	1355x520x900
Internal Dimensions, WxDxH	508x355x732	805x345x730	1257x345x730
Doors	1 hinged glass	2 hinged glass	3 hinged glass
Shelves/Baskets	2, 496x350	4, 330x395	6, 405x365
Outer Body	Black	Black	Black
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Lock	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	210	230	260
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	49	67,4	94,6
Net Weight, kg	47	65,4	91,6
Noise Level dbA	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical
Thermometer	N	N	N
Refrigerant	R134a	R134a	R134a
Charge, g	76	140	186
Internal Light	LED	LED	LED
Option: Charged with R600a			

## » Back Bars



### BA10HSD

- Fan assisted cooling
- Solid door
- 2 Adjustable shelves
- Adjustable feet





### BA20HSD

- Fan assisted cooling
- Solid doors
- 4 Adjustable shelves
- Adjustable feet



### BA30HSD

- Fan assisted cooling
- 3 Solid doors
- 2 Adjustable shelves behind each door
- Adjustable feet

## Technical specifications

Model	BA10HSD	BA20HSD	BA30HSD
Climate Class	N	N	N
Temperature Range, °C	2 to 10	2 to 10	2 to 10
Gross Volume, l	124	196	328
Net Volume, l	118	188	320
Cans, 330 ml	161	270	425
Cans, 500 ml	112	188	296
Bottles, 330 ml	96	156	240
Bottles, 1,5 l PET	-	-	-
External Dimensions, WxDxH	600x520x900	900x520x900	1355x520x900
Internal Dimensions, WxDxH	508x355x732	805x345x730	1257x345x730
Doors	1 hinged solid	2 hinged solid	3 hinged solid
Shelves/Baskets	2, 496x350	4, 330x395	6, 405x365
Outer Body	Black	Black	Black
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Lock	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	210	230	260
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	45	58	79
Net Weight, kg	43	56	76
Noise Level dbA	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical
Thermometer	N	N	N
Refrigerant	R134a	R134a	R134a
Charge, g	76	140	186
Internal Light	LED	LED	LED
Option: Charged with R600a			

## » Counter Bottle Coolers



### CBC210G

- Fan assisted cooling
- 2 Glass doors
- Stainless steel interior
- 4 Adjustable stainless steel shelves
- Adjustable feet



Stainless steel shelves



**CBC310G**

- Internal LED light
- Fan assisted cooling
- 3 Glass doors
- Stainless steel interior
- 6 Adjustable stainless steel shelves
- Adjustable feet



**CBC410G**

- Internal LED light
- Fan assisted cooling
- 4 Glass doors
- Stainless steel interior
- 8 Adjustable stainless steel shelves
- Adjustable feet

## Technical specifications

Model	CBC210G	CBC310G	CBC410G
Climate Class	N	N	N
Temperature Range, °C	2 to 10	2 to 10	2 to 10
Gross Volume, l	290	460	630
Net Volume, l	277	442	605
Cans, 330 ml	-	-	-
Cans, 500 ml	-	-	-
Bottles, 330 ml	-	-	-
Bottles, 1,5 l PET	-	-	-
External Dimensions, WxDxH	1462x513x860	2002x513x860	2542x513x860
Internal Dimensions, WxDxH	1082x415x760	1622x415x760	2162x415x760
Doors	2 hinged glass	3 hinged glass	4 hinged glass
Shelves/Baskets	4, SS304	6, SS304	8, SS304
Outer Body	Black, RAL9011	Black, RAL9011	Black, RAL9011
Interior	SS430	SS430	SS430
Castors/Feet	6 adjustable feet	8 adjustable feet	10 adjustable feet
Lock	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	250	250	350
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	121,5	154	171
Net Weight, kg	100	125	150
Noise Level dbA	42	42	44
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital
Thermometer	Y	Y	Y
Refrigerant	R134a	R134a	R134a
Charge, g	150	160	190
Internal Light	LED	LED	LED

## » Counter Bottle Coolers



### CBC220

- Fan assisted cooling
- 1 Solid door
- 2 Drawers
- Stainless steel interior
- 2 Adjustable stainless steel shelves
- Adjustable feet



Combinations of drawers and doors are easily made as doors and drawers are provided as separate kits



**CBC210**

- Fan assisted cooling
- 2 Solid doors
- Stainless steel interior
- 4 Adjustable stainless steel shelves
- Adjustable feet



**CBC240**

- Fan assisted cooling
- 4 Drawers
- Stainless steel interior
- Adjustable feet

## Technical specifications

Model	CBC210	CBC220	CBC240
Climate Class	N	N	N
Temperature Range, °C	2 to 10	2 to 10	2 to 10
Gross Volume, l	290	290	290
Net Volume, l	277	277	277
Cans, 330 ml	-	-	-
Cans, 500 ml	-	-	-
Bottles, 330 ml	-	-	-
Bottles, 1,5 l PET	-	-	-
External Dimensions, WxDxH	1462x513x860	1462x513x860	1462x513x860
Internal Dimensions, WxDxH	1082x415x760	1082x415x760	1082x415x760
Doors	2 hinged solid	1 door, 2 drawers	4 drawers
Shelves/Baskets	4, SS304	2, SS304	0
Outer Body	Black, RAL9011	Black, RAL9011	Black, RAL9011
Interior	SS430	SS430	SS430
Castors/Feet	6 adjustable feet	6 adjustable feet	6 adjustable feet
Lock	Y	Y	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	250	250	250
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	110,5	-	-
Net Weight, kg	89	-	-
Noise Level dbA	42	42	42
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital
Thermometer	Y	Y	Y
Refrigerant	R134a	R134a	R134a
Charge, g	150	150	150
Internal Light	LED	LED	LED

## » Counter Bottle Coolers



### CBC320

- Internal LED light
- Fan assisted cooling
- 2 Solid doors
- 2 Drawers
- Stainless steel interior
- 6 Adjustable stainless steel shelves
- Adjustable feet



**CBC310**

- Fan assisted cooling
- Solid doors
- Stainless steel interior
- 6 Adjustable stainless steel shelves
- Adjustable feet



**CBC360**

- Internal LED light
- Fan assisted cooling
- 6 Drawers
- Stainless steel interior
- Adjustable feet

## Technical specifications

Model	CBC310	CBC320	CBC340	CBC360
Climate Class	N	N	N	N
Temperature Range, °C	2 to 10	2 to 10	2 to 10	2 to 10
Gross Volume, l	460	460	460	460
Net Volume, l	442	442	442	442
Cans, 330 ml	-	-	-	-
Cans, 500 ml	-	-	-	-
Bottles, 330 ml	-	-	-	-
Bottles, 1,5 l PET	-	-	-	-
External Dimensions, WxDxH	2002X513X860	2002X513X860	2002X513X860	2002X513X860
Internal Dimensions, WxDxH	1622X415X760	1622X415X760	1622X415X760	1622X415X760
Doors	3 hinged solid	2 doors, 2 drawers	1 door, 4 drawers	6 drawers
Shelves/Baskets	6, SS304	4, SS304	2, SS304	0
Outer Body	Black, RAL9011	Black, RAL9011	Black, RAL9011	Black, RAL9011
Interior	SS430	SS430	SS430	SS430
Castors/Feet	8 adjustable feet	8 adjustable feet	8 adjustable feet	8 adjustable feet
Lock	Y	Y	Y	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	250	250	250	250
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	139	-	-	-
Net Weight, kg	106	-	-	-
Noise Level dbA	42	42	42	42
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	160	160	160	160
Internal Light	LED	LED	LED	LED

## » Counter Bottle Coolers



### CBC440

- Internal LED light
- Fan assisted cooling
- 2 Solid doors
- 4 Drawers
- Stainless steel interior
- 4 Adjustable stainless steel shelves
- Adjustable feet





#### CBC410

- Internal LED light
- Fan assisted cooling
- 4 Solid doors
- Stainless steel interior
- 8 Adjustable stainless steel shelves
- Adjustable feet



#### CBC480

- Internal LED light
- Fan assisted cooling
- 8 Drawers
- Stainless steel interior
- Adjustable feet

## Technical specifications

Model	CBC410	CBC420	CBC440	CBC460	CBC480
Climate Class	N	N	N	N	N
Temperature Range, °C	2 to 10	2 to 10	2 to 10	2 to 10	2 to 10
Gross Volume, l	630	630	630	630	630
Net Volume, l	605	605	605	605	605
Cans, 330 ml	-	-	-	-	-
Cans, 500 ml	-	-	-	-	-
Bottles, 330 ml	-	-	-	-	-
Bottles, 1,5 l PET	-	-	-	-	-
External Dimensions, WxDxH	2542x513x860	2542x513x860	2542x513x860	2542x513x860	2542x513x860
Internal Dimensions, WxDxH	2162x415x760	2162x415x760	2162x415x760	2162x415x760	2162x415x760
Doors	4 hinged solid	3 doors, 2 drawers	3 doors, 2 drawers	1 door, 6 drawers	8 drawers
Shelves/Baskets	8, SS304	6, SS304	6, SS304	2, SS304	0
Outer Body	Black, RAL9011	Black, RAL9011	Black, RAL9011	Black, RAL9011	Black, RAL9011
Interior	SS430	SS430	SS430	SS430	SS430
Castors/Feet	10 adjustable feet	10 adjustable feet	10 adjustable feet	10 adjustable feet	10 adjustable feet
Lock	Y	Y	Y	Y	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	350	350	350	350	350
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	144	-	-	-	-
Net Weight, kg	123	-	-	-	-
Noise Level dbA	44	44	44	44	44
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a	R134a
Charge, g	190	190	190	190	190
Internal Light	LED	LED	LED	LED	LED

## Wine Coolers

Tefcold offers a wide selection of wine coolers and –dispensers for storage, display and serving of wine.

Our classic CPV/CPP1380 model is available in two different colours with solid or glass door.

The exclusive TFW range has a new, improved design. This range includes practical, wooden slide-out shelves for an easier loading of wine bottles, and can be offered with black or stainless steel door frame.

This range also offers cabinets with two temperature zones.

Kindly note our new CPV28 wine cooler, which is an elegant substitute for the popular CPV27.







## » Wine Coolers



Optional presentationshelf

### TFW365-2S

- 2 temperature zones
- Internal LED light
- 15 wooden drawing shelves
- Tinted glass door for protection of wine
- Black exterior
- Stainless steel door frame
- Stainless steel handle
- Adjustable feet
- Reversible door
- Electronic thermostat
- Lock fitted as standard
- Charcoal filter included



#### TFW80S

- 1 temperature zone
- Internal LED light
- 6 wooden drawing shelves
- Tinted glass door for protection of wine
- Black exterior
- Stainless steel door frame
- Stainless steel handle
- Adjustable feet
- Reversible door
- Electronic thermostat
- Charcoal filter included



#### TFW160S

- 1 temperature zone
- Internal LED light
- 4 wooden drawing shelves
- Tinted glass door for protection of wine
- Black exterior
- Stainless steel door frame
- Stainless steel handle
- Adjustable feet
- Reversible door
- Electronic thermostat
- Charcoal filter included

## Technical specifications

Model	TFW80S	TFW160S	TFW160-2S	TFW365-2S	TFW375S
Climate Class	N	N	N	N	N
Temperature Range, °C	5-18	5-18	5-10 /10-18	5-10 /10-18	5-18
Gross Volume, l	80	155	155	380	380
Net Volume, l	57	141	131	360	370
Winebottles, 750 ml	18	45	38	155	168
External Dimensions, WxDxH	295x570x860	595x570x820	595x570x820	595x680x1800	595x680x1800
Internal Dimensions, WxDxH	227x492x658	520x445x605	520x445x605	510x540x1540	510x540x1540
Doors	1 hinged glass	1 hinged glass	1 hinged glass	1 hinged glass	1 hinged glass
Shelves/Baskets	6, wooden	4, wooden	4, wooden	15, wooden	16, wooden
Outer Body	Black	Black	Black	Black	Black
Interior	ABS	ABS	ABS	ABS	ABS
Castors/Feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Lock	N	N	N	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	90	160	160	220	220
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	34	54	54	118	118
Net Weight, kg	30	50	50	112	112
Noise Level dbA	40	40	40	40	40
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y	Y
Refrigerant	R600a	R600a	R600a	R600a	R600a
Charge, g	-	-	-	-	-
Internal Light	LED	LED	LED	LED	LED



# » Wine Coolers



Optional presentationshelf



Lock fitted as standard

## TFW365-2

- 2 temperature zones
- Internal LED light
- 15 wooden drawing shelves
- Tinted glass door for protection of wine
- Black exterior
- Integrated handle
- Adjustable feet
- Reversible door
- Electronic thermostat
- Lock fitted as standard
- Charcoal filter included



Slide out shelves

#### TFW375

- 1 temperature zone
- Internal LED light
- 16 wooden drawing shelves
- Tinted glass door for protection of wine
- Black exterior
- Integrated handle
- Adjustable feet
- Reversible door
- Electronic thermostat
- Lock fitted as standard
- Charcoal filter included

## Technical specifications

Model	TFW365-2	TFW375
Climate Class	N	N
Temperature Range, °C	5-10 /10-18	5-18
Gross Volume, l	380	380
Net Volume, l	360	370
Winebottles, 750 ml	155	168
External Dimensions, WxDxH	595x680x1800	595x680x1800
Internal Dimensions, WxDxH	510x540x1540	510x540x1540
Doors	1 hinged glass	1 hinged glass
Shelves/Baskets	15, wooden	16, wooden
Outer Body	Black	Black
Interior	ABS	ABS
Castors/Feet	4 adjustable feet	4 adjustable feet
Lock	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50
Input Power, W	220	220
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	118	118
Net Weight, kg	112	112
Noise Level dbA	40	40
Type of Cooling	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic
Controller	Digital	Digital
Thermometer	Y	Y
Refrigerant	R600a	R600a
Charge, g	-	-
Internal Light	LED	LED



## » Wine Coolers



CPV28



- Interior light
- Tinted glass door for protection of wine
- 11 chromium wine shelves
- Digital temperature display
- Lock
- Adjustable feet
- Black exterior
- Reversible door





### SC85

- Interior light
- Tinted glass door for protection of wine
- 4 chromium wine shelves
- Adjustable feet
- Black exterior
- Reversible door



### DKS95-3 dispenser

- For Bag-in-Box wine, 3 x 10 l.
- Stainless steel interior
- Stainless steel shelves inside
- 3 taps for serving in wine glass or decanter
- Exterior in color Bordeaux
- CFC-free
- Adjustable rubber feet
- Reversible door
- Stainless steel drip tray

## Technical specifications

Model	CPV28	DKS95-2	DKS95-3	SC85
Climate Class	T	N	N	N
Temperature Range, °C	7-18	5 to 18	5 to 18	2 to 10
Gross Volume, l	215	118	95	92
Net Volume, l	210	112	90	85
Winebottles, 750 ml	65	2 BIB	3 BIB	22
External Dimensions, WxDxH	544x600x1250	392x595x1120	350x455x1145	550x550x770
Internal Dimensions, WxDxH	-	295x494x805	255x415x825	410x415x630
Doors	1 hinged glass	1 hinged	1 hinged	1 hinged glass
Shelves/Baskets	11, wire	2	3	4 wire
Outer Body	Black	Bordeaux	Bordeaux	Black
Interior	ABS	SS304	SS304	ABS
Castors/Feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Lock	Y	N	N	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	86	80	80	75
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	70	55	39,5	35
Net Weight, kg	64,5	50	36	33
Noise Level dbA	40	40	40	40
Type of Cooling	Static	Static	Static	Static
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Digital	Mechanical	Mechanical	Mechanical
Thermometer	Y	N	N	N
Refrigerant	R600a	R134a	R134a	R134a
Charge, g	63	80	56	80
Internal Light	10W Bulb	N	N	8 W neon



## » Wine Coolers



### CPV1380M

- 6 adjustable wooden shelves (Steel front as option)
- Reversible Glass door
- Brown exterior
- Adjustable feet
- Easily replaceable door gasket
- Temperature display
- Lock fitted as standard
- Available in colour bordeaux CPP1380BX



#### CPP1380M

- 6 adjustable wooden shelves (Steel front as option)
- Reversible Solid door
- Brown exterior
- Adjustable feet
- Easily replaceable door gasket
- Temperature display
- Lock fitted as standard
- Available in colour bordeaux CPP1380BX



#### CPP1380BX

- 6 adjustable wooden shelves (Steel front as option)
- Reversible Solid door
- Bordeaux exterior
- Adjustable feet
- Easily replaceable door gasket
- Temperature display
- Lock fitted as standard
- Available in colour brown CPP1380M

## Technical specifications

Model	CPP1380BX	CPP1380M	CPV1380BX	CPV1380M
Climate Class	N	N	N	N
Temperature Range, °C	6 to 18	6 to 18	6 to 18	6 to 18
Gross Volume, l	372	372	372	372
Net Volume, l	350	350	350	350
Winebottles, 750 ml	118	118	118	118
External Dimensions, WxDxH	595x640x1840	595x640x1840	595x640x1840	595x640x1840
Internal Dimensions, WxDxH	505x462x1555	505x462x1555	505x462x1555	505x462x1555
Doors	1 solid	1 solid	1 hinged glass	1 hinged glass
Shelves/Baskets	5, wooden 495x390	5, wooden 495x390	5, wooden 495x390	5, wooden 495x390
Outer Body	Bordeaux	Brown	Bordeaux	Brown
Interior	Brown, ABS	Brown, ABS	Brown, ABS	Brown, ABS
Castors/Feet	2 adjustable feet	2 adjustable feet	2 adjustable feet	2 adjustable feet
Lock	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	140	140	180	180
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	81	81	94	94
Net Weight, kg	75	75	86	86
Noise Level dbA	42	42	42	42
Type of Cooling	Static	Static	Static	Static
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	N	N	N	N
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	200	200	200	200
Internal Light	N	N	15 W Neon	15 W Neon



## Minibars

The Tefcold minibars are available in three different sizes, two different colours as standard and with solid or glass door (black colour only).

The absorption system ensures silent operation, and all models are supplied with key lock and internal LED light.



TEFCOLD



# » Minibars



Interior LED light

### TM50G Black

- Silent operation
- Interior LED light
- Low maintenance
- Low energy consumption
- Reversible glass door
- 2 adjustable shelves
- Automatic defrost
- Lock



#### TM30G Black

- Silent operation
- Interior LED light
- Low maintenance
- Low energy consumption
- Reversible glass door
- 1 adjustable shelf
- Automatic defrost
- Lock



#### TM40G Black

- Silent operation
- Interior LED light
- Low maintenance
- Low energy consumption
- Reversible glass door
- 2 adjustable shelves
- Automatic defrost
- Lock

## Technical specifications

Model	TM30G Black	TM40G Black	TM50G Black
Climate Class, N,SN,ST,T	N	N	N
Temperature Range, °C	5-12	5-12	5-12
Gross Volume, l	31	41	51
Net Volume, l	30	40	50
External Dimensions, WxDxH	402x420x500	402x452x560	402x452x670
Internal Dimensions, WxDxH	316x215x400	316x245x459	316x245x569
Doors	1 glass	1 glass	1 glass
Shelves/Baskets	1	2	2
Outer Body	Black	Black	Black
Interior	ABS, RAL7005	ABS, RAL7005	ABS, RAL7005
Castors/Feet	3 feet	3 feet	3 feet
Lock	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50-60	220-240/50-60	220-240/50-60
Input Power, W	60	60	90
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	19	21,5	24
Net Weight, kg	17,5	18,5	20
Noise Level dbA	-	-	-
Type of Cooling	Absorbtion	Absorbtion	Absorbtion
Type of Defrost	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical
Thermometer	N	N	N
Refrigerant	NH3	NH3	NH3
Charge, g	70	72	80
Internal Light	LED	LED	LED

# » Minibars



### TM30 Black

- Silent operation
- Interior LED light
- Low maintenance
- Low energy consumption
- Reversible door
- 1 adjustable shelf
- Inner door shelf
- Automatic defrost
- Lock



Black cabinets with grey inner liner



Available in white with white inner liner



Available in brown with white inner liner





#### TM40 Black

- Silent operation
- Interior LED light
- Low maintenance
- Low energy consumption
- Reversible door
- 2 adjustable shelves
- Inner door shelves
- Automatic defrost
- Lock



#### TM50 Black

- Silent operation
- Interior LED light
- Low maintenance
- Low energy consumption
- Reversible door
- 2 adjustable shelves
- Inner door shelves
- Automatic defrost
- Lock

## Technical specifications

Model	TM30 Black	TM40 Black	TM50 Black
Climate Class	N	N	N
Temperature Range, °C	2-12	2-12	2-12
Gross Volume, l	31	41	51
Net Volume, l	30	40	50
External Dimensions, WxDxH	402x420x500	402x452x560	402x452x670
Internal Dimensions, WxDxH	316x215x400	316x245x459	316x245x569
Doors	1 solid	1 solid	1 solid
Shelves/Baskets	1	2	2
Outer Body	Black	Black	Black
Interior	ABS, RAL7005	ABS, RAL7005	ABS, RAL7005
Castors/Feet	3 feet	3 feet	3 feet
Lock	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50-60	220-240/50-60	220-240/50-60
Input Power, W	60	60	60
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	15	17,5	20
Net Weight, kg	13,5	14,5	16
Noise Level dbA	-	-	-
Type of Cooling	Absorbtion	Absorbtion	Absorbtion
Type of Defrost	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical
Thermometer	N	N	N
Refrigerant	NH3	NH3	NH3
Charge, g	70	72	80
Internal Light	LED	LED	LED

## Freezers

Ice Cream | Chest | Upright

The upright UFFS/UFSC freezers match the popular bottle coolers series FS/SCU. They are available with solid door or glass door and with or without illuminated canopy. As the bottle coolers, these freezers are well suited for branding.

The smaller UF50/100G merchandising models with glass door can be placed on counters for a better display of products, and are also available with illuminated canopy.

Ice cream freezers are offered in 6 different sizes with a diversity of lids. All models are very well suited for branding.

The EMMY and BODIL as well as the new PIA series consist of scoop ice display freezers in various sizes with glass structure.

The chest freezers are available in five different sizes, all with stainless steel lid as option. Internal baskets are included in all models.





## » Ice Cream Freezers

Tefcold offers ice cream freezers with three variations of sliding glass lids (IC-models) as well as hinged glass lids (ST-models) for a clear presentation of products, all available in 6 different sizes. Baskets are included in all models.

All models are very well suited for branding. Illuminated display board can be supplied as factory order, and baskets are supplied for all models as standard.

The EMMY and BODIL as well as the new PIA series consist of scoop ice display freezers in various sizes with glass structure.

Kindly note the new NIC range of ice cream freezers on page 93-95.



# » Ice Cream Freezers



## NIC 100

- Curved sliding lid
- Thermometer
- Inner liner of stucco aluminium
- 4 castors included
- Options:
- Customized decoration
- Illuminated display board
- Dividers



Vertically sliding lid NIC 100



Option: Dividers



Option: Illuminated display board

Available primo 2012



**NIC 200**

- Curved sliding lids
- Thermometer
- Inner liner of stucco aluminium
- 4 castors included
- Options:
- Customized decoration
- Illuminated display board
- Dividers



**NIC 300**

- Curved sliding lids
- Thermometer
- Inner liner of stucco aluminium
- 4 castors included
- Options:
- Customized decoration
- Illuminated display board
- Dividers

## Technical specifications

Model	NIC 100	NIC 200	NIC 300	NIC 400	NIC 500
Climate Class	N	N	N	N	N
Temperature Range, °C	-14 to -24	-14 to -24	-14 to -24	-14 to -24	-14 to -24
Gross Volume, l	130	210	320	435	530
Net Volume, l	115	157	245	334	410
External Dimensions, WxDxH(with wheels)	665x665x940	740x650x1005	1030x650x1005	1320x650x1005	1570x650x1005
Internal Dimensions, WxDxH	510x510x690	600x510x640	890x510x640	1180x510x640	1430x510x640
Doors	1 curved sliding glass	2 curved sliding glass	2 curved sliding glass	2 curved sliding glass	2 curved sliding glass
Shelves/Baskets	-	-	-	-	-
Outer Body	White	White	White	White	White
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake
Lock	N	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	120	190	220	300	400
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	60	63	70	87	122
Net Weight, kg	47	52	62	72	110
Noise Level dbA	45	45	45	45	45
Type of Cooling	Static	Static	Static	Static	Static
Type of Defrost	Manual	Manual	Manual	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y	Y
Refrigerant	R404a	R404a	R404a	R404a	R404a
Charge, g	-	130	145	155	165
Internal Light	N	N	N	N	N
Option: Charged with R290					

## » Ice Cream Freezers



### IC400SC

- Flat sliding lids with lock
- Thermometer
- Inner liner of stucco aluminium
- 2 baskets included
- 4 castors included
- Options: Customized decoration
- Illuminated display board



Various sizes of baskets available



Illumated display board available





#### IC200SC

- Flat sliding lids with lock
- Thermometer
- Inner liner of stucco aluminium
- 1 basket included
- 4 castors included
- Options: Customized decoration
- Illuminated display board



#### IC500SC

- Flat sliding lids with lock
- Thermometer
- Inner liner of stucco aluminium
- 2 baskets included
- 4 castors included
- Options: Customized decoration
- Illuminated display board

## Technical specifications

Model	IC200SC	IC300SC	IC400SC	IC500SC	IC700SC
Climate Class	N	N	N	N	N
Temperature Range, °C	-14 to -24	-14 to -24	-14 to -24	-14 to -24	-14 to -24
Gross Volume, l	191	296	401	491	670
Net Volume, l	165	255	350	430	620
External Dimensions, WxDxH(with wheels)	720x630x798(892)	1010x630x798(892)	1300x630x798(892)	1550x630x798(892)	2055x630x798(892)
Internal Dimensions, WxDxH	600x510x655	890x510x655	1180x510x655	1430x510x655	1930x510x655
Doors	2 flat sliding glass	2 flat sliding glass	2 flat sliding glass	2 flat sliding glass	2 flat sliding glass
Shelves/Baskets	1 basket	1 basket	2 baskets	2 baskets	3 baskets
Outer Body	White	White	White	White	White
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake
Lock	Y	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	218	239	330	335	645
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	52	63	72	80	107
Net Weight, kg	46	56	64	72	101
Noise Level dbA	45	45	45	45	45
Type of Cooling	Static	Static	Static	Static	Static
Type of Defrost	Manual	Manual	Manual	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y	Y
Refrigerant	R134a	R134a	R404a	R404a	R404a
Charge, g	160	190	220	230	270
Internal Light	N	N	N	N	N

# » Ice Cream Freezers



## IC300SCE

- Angled sliding lids with lock
- Thermometer
- Inner liner of stucco aluminium
- 1 basket included
- 4 castors included
- Options: Customized decoration
- Illuminated display board



Various sizes of baskets available



4 castores included



#### IC200SCE

- Angled sliding lids with lock
- Thermometer
- Inner liner of stucco aluminium
- 1 basket included
- 4 castors included
- Options: Customized decoration
- Illuminated display board



#### IC400SCE

- Angled sliding lids with lock
- Thermometer
- Inner liner of stucco aluminium
- 2 baskets included
- 4 castors included
- Options: Customized decoration
- Illuminated display board

## Technical specifications

Model	IC100SCE	IC200SCE	IC300SCE	IC400SCE	IC500SCE
Climate Class	N	N	N	N	N
Temperature Range, °C	-14 to -24	-14 to -24	-14 to -24	-14 to -24	-14 to -24
Gross Volume, l	100	176	264	352	427
Net Volume, l	85	157	230	325	398
External Dimensions, WxDxH(with wheels)	570x570x680/800(885)	720x615x710/855(949)	1010x615x710/855(949)	1300x615x710/855(949)	1550x615x710/855(949)
Internal Dimensions, WxDxH	450x450x385/490	600x495x610/710	890x495x610/710	1180x495x610/710	1430x495x610/710
Doors	2 flat sliding glass	2 flat sliding glass	2 flat sliding glass	2 flat sliding glass	2 flat sliding glass
Shelves/Baskets	1 basket	1 basket	1 basket	2 baskets	2 baskets
Outer Body	White	White	White	White	White
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake
Lock	Y	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	129	218	239	330	335
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	40	54	64	74	80
Net Weight, kg	36,5	49	57	66	72
Noise Level dbA	45	45	45	45	45
Type of Cooling	Static	Static	Static	Static	Static
Type of Defrost	Manual	Manual	Manual	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R404a	R404a
Charge, g	65	160	190	220	230
Internal Light	N	N	N	N	N

## » Ice Cream Freezers



### IC400SCEB

- Curved sliding lids with lock
- Thermometer
- Inner liner of stucco aluminium
- 2 baskets included
- 4 castors included
- Options: Customized decoration
- Illuminated display board



Various sizes of baskets available



Illuminated display board available



#### IC200SCEB

- Curved sliding lids with lock
- Thermometer
- Inner liner of stucco aluminium
- 1 basket included
- 4 castors included
- Options: Customized decoration
- Illuminated display board



#### IC500SCEB

- Curved sliding lids with lock
- Thermometer
- Inner liner of stucco aluminium
- 2 baskets included
- 4 castors included
- Options: Customized decoration
- Illuminated display board

## Technical specifications

Model	IC100SCEB	IC200SCEB	IC300SCEB	IC400SCEB	IC500SCEB
Climate Class	T	T	T	T	T
Temperature Range, °C	-14 to -24	-14 to -24	-14 to -24	-14 to -24	-14 to -24
Gross Volume, l	100	176	264	352	427
Net Volume, l	85	157	230	325	398
External Dimensions, WxDxH(with wheels)	570x570x680/800(885)	720x615x710/855(949)	1010x615x710/855(949)	1300x615x710/855(949)	1550x615x710/855(949)
Internal Dimensions, WxDxH	450x450x385/490	600x495x610/710	890x495x610/710	1180x495x610/710	1430x495x610/710
Doors	2 curved sliding glass	2 curved sliding glass	2 curved sliding glass	2 curved sliding glass	2 curved sliding glass
Shelves/Baskets	1 basket	1 basket	1 basket	2 baskets	2 baskets
Outer Body	White	White	White	White	White
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake
Lock	Y	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	129	218	239	330	335
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	40	54	64	74	80
Net Weight, kg	36,5	49	57	66	72
Noise Level dbA	45	45	45	45	45
Type of Cooling	Static	Static	Static	Static	Static
Type of Defrost	Manual	Manual	Manual	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R404a	R404a
Charge, g	65	160	190	220	230
Internal Light	N	N	N	N	N

# » Scoop Ice freezers



## EMMY8

- Open model for Scoop ice
- Curved glass 'Sneeze Guard' structure
- Internal light
- Hinged lid
- Thermometer
- Suited for Gastronorm pans
- Options: Customized decoration



Suited for both Italian pans  
and Gastronorm pans



#### EMMY6

- Open model for Scoop ice
- Curved glass 'Sneeze Guard' structure
- Internal light
- Hinged lid
- Thermometer
- Suited for Gastronorm pans
- Options: Customized decoration



#### EMMY10

- Open model for Scoop ice
- Curved glass 'Sneeze Guard' structure
- Internal light
- Hinged lid
- Thermometer
- Suited for Gastronorm pans
- Options: Customized decoration

## Technical specifications

Model	EMMY6	EMMY8	EMMY10
Climate Class	N	N	N
Temperature Range, °C	-12 to -22	-12 to -22	-12 to -22
Gross Volume, l	234	276	318
Net Volume, l	201	239	275
Pans	-	-	-
External Dimensions, WxDxH	860x717x1247	860x827x1247	990x827x1247
Internal Dimensions, WxDxH	-	-	-
Doors	1 hinged plexiglass	1 hinged plexiglass	1 hinged plexiglass
Shelves/Baskets	0	0	0
Outer Body	White	White	White
Interior	ABS	ABS	ABS
Castors/Feet	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake
Lock	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	610	720	870
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	120	135	160
Net Weight, kg	95	110	125
Noise Level dbA	45	45	45
Type of Cooling	Static	Static	Static
Type of Defrost	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital
Thermometer	Y	Y	Y
Refrigerant	R404a	R404a	R404a
Charge, g	340	630	730
Internal Light	LED	LED	LED

## » Scoop Ice freezers



### BODIL 7-V

- Open model for Scoop ice
- Curved glass 'Sneeze Guard' structure
- Internal LED light
- Hinged lid
- Thermometer
- Ventilated cooling
- Options: Customized decoration



Suited for both Italian pans and Gastronorm pans



Air-Conductor included in Bodil-V models to avoid water condensing on glass.





#### BODIL 7

- Open model for Scoop ice
- Curved glass 'Sneeze Guard' structure
- Internal LED light
- Hinged lid
- Thermometer
- Static cooling
- Options: Customized decoration



#### BODIL 9-V

- Open model for Scoop ice
- Curved glass 'Sneeze Guard' structure
- Internal LED light
- Hinged lid
- Thermometer
- Ventilated cooling
- Options: Customized decoration

## Technical specifications

Model	IC7SCE	BODIL 7	BODIL 9	BODIL 7-V	BODIL 9-V
Climate Class	N	N	N	N	N
Temperature Range, °C	-12 to -22	-12 to -22	-12 to -22	-12 to -22	-12 to -22
Gross Volume, l	347	350	455	350	455
Net Volume, l	257	337	433	337	433
Pans	-	Capacity for 7	Capacity for 9	Capacity for 7	Capacity for 9
External Dimensions, WxDxH	1327x515x1250	1370x670x1247	1722x670x1247	1370x670x1247	1722x670x1247
Internal Dimensions, WxDxH	1210x395x680/860	-	-	-	-
Doors	2 flat sliding glass	1 hinged plexiglass	1 hinged plexiglass	1 hinged plexiglass	1 hinged plexiglass
Shelves/Baskets	7 baskets, scoop	Dividers	Dividers	Dividers	Dividers
Outer Body	White	White	White	White	White
Interior	Stucco Aluminium	ABS	ABS	ABS	ABS
Castors/Feet	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake
Lock	Y	N	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	300	692	740	720	825
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	94	240	265	240	265
Net Weight, kg	82	180	215	180	215
Noise Level dbA	45	45	45	45	45
Type of Cooling	Static	Static	Static	Ventilated	Ventilated
Type of Defrost	Manual	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y	Y
Refrigerant	R404a	R404a	R404a	R404a	R404a
Charge, g	190	850	850	1250	1350
Internal Light	LED	LED	LED	LED	LED

# » Scoop Ice freezers



## PIA 7

- Open model for Scoop ice
- Curved glass 'Sneeze Guard' structure
- Storage compartment
- Internal LED light
- Hinged lid
- Thermometer
- Static cooling
- Options: Customized decoration



Suited for both Italian pans and Gastronorm pans



Storage compartment.



#### PIA 9

- Open model for Scoop ice
- Curved glass 'Sneeze Guard' structure
- Storage compartment
- Internal LED light
- Hinged lid
- Thermometer
- Static cooling
- Options: Customized decoration

### Technical specifications

Model	PIA 7	PIA 9
Climate Class	N	N
Temperature Range, °C	-12 to -22	-12 to -22
Gross Volume, l	460	610
Net Volume, l	445	595
Pans	Capacity for 7	Capacity for 9
External Dimensions, WxDxH	1370x670x1247	1722x670x1247
Internal Dimensions, WxDxH	-	-
Doors	1 hinged plexiglass	1 hinged plexiglass
Shelves/Baskets	Dividers	Dividers
Outer Body	White	White
Interior	ABS	ABS
Castors/Feet	2 with, 2 without brake	2 with, 2 without brake
Lock	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50
Input Power, W	750	850
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	240	265
Net Weight, kg	180	215
Noise Level dbA	45	45
Type of Cooling	Static	Static
Type of Defrost	Automatic	Automatic
Controller	Digital	Digital
Thermometer	Y	Y
Refrigerant	R404a	R404a
Charge, g	760	1350
Internal Light	LED	LED

## » Ice Cream Freezers



### ST160

- Flat hinged glass lid
- Inner liner of stucco aluminium
- 1 basket included
- 4 double castors included
- Options: Customized decoration
- Illuminated display board



#### ST400

- Flat hinged glass lid
- Thermometer
- Inner liner of stucco aluminium
- 1 basket included (As standard)
- 4 double castors included
- Options: Customized decoration
- Illuminated display board

## Technical specifications

Model	ST160	ST200	ST300	ST400	ST500	ST700
Climate Class	N	N	N	N	N	N
Temperature Range, °C	-14 to -24	-14 to -24	-14 to -24	-14 to -24	-14 to -24	-14 to -24
Gross Volume, l	115	174	296	401	491	670
Net Volume, l	105	160	255	350	430	620
External Dimensions, WxDxH	550x550x870	720x720x860	1010x720x860	1300x720x860	1550x720x860	2055x720x860
Internal Dimensions, WxDxH	435x435x755	600x510x655	890x510x655	1180x510x655	1430x510x655	1930x510x655
Doors	1 hinged glass lid	1 hinged glass lid	1 hinged glass lid	1 hinged glass lid	1 hinged glass lid	1 hinged glass lid
Shelves/Baskets	1 basket	1 basket	1 basket	1 basket	1 basket	1 basket
Outer Body	White	White	White	White	White	White
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	4	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake
Lock	N	Y	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	130	175	205	330	345	345
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	43	56	65	77	86	115
Net Weight, kg	35	51	58	69	78	105
Noise Level dbA	42	45	45	45	45	45
Type of Cooling	Static	Static	Static	Static	Static	Static
Type of Defrost	Manual	Manual	Manual	Manual	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R404a	R404a	R404a
Charge, g	90	160	190	190	230	270
Internal Light	N	N	N	N	N	N

## » Ice Cream Freezers



### DD420

- Curved sliding lids
- LED light
- Thermometer
- Inner liner powder coated
- 12 dividers included
- 4 castors included
- Options: Customized decoration
- LED illuminated display board

Available primo 2012



Divider system

## Technical specifications

Model	DD420
Climate Class	N
Temperature Range, °C	-18 to -25
Gross Volume, l	450
Net Volume, l	408
External Dimensions, WxDxH	1210x790x1213
Internal Dimensions, WxDxH	-
Doors	Double layer curved glass
Shelves/Baskets	12 dividers
Outer Body	White/Grey
Interior	Powder coated
Castors/Feet	4 castors
Lock	N
Voltage/Frequency, V/Hz	220-240/50
Input Power, W	850
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	-
Net Weight, kg	-
Noise Level dbA	45
Type of Cooling	Static
Type of Defrost	Manual
Controller	Electronic
Thermometer	Y
Refrigerant	R134a
Charge, g	-
Internal Light	LED
Canopy Light	LED

## » Chest freezers

The FR-range offers chest freezers in five different sizes, all available with stainless steel lid as option. Internal baskets are included in all models.

The CF700 is a commercial freezer well-suited for long-time storage.





## » Chest freezers



### FR305

- Handle with lock
- Defrost water drain
- Thermometer included
- Inner liner of stucco aluminium
- 4 castors included
- 1 basket included



**FR205**

- Handle with lock
- Defrost water drain
- Thermometer included
- Inner liner of stucco aluminium
- 4 castors included
- 1 basket included



**FR605**

- Handle with lock
- Defrost water drain
- Thermometer included
- Inner liner of stucco aluminium
- Internal light
- 3 baskets included
- 4 castors included

## Technical specifications

Model	FR205	FR305	FR405	FR505	FR605
Climate Class	T	T	T	T	T
Temperature Range, °C	-14 to -24	-14 to -24	-14 to -24	-14 to -24	-14 to -24
Gross Volume, l	189	278	385	463	567
Net Volume, l	185	273	377	454	557
External Dimensions, WxDxH	734x700x945	984x700x945	1284x700x945	1504x700x945	1804x700x945
Internal Dimensions, WxDxH	610x480x725	860x480x725	1160x480x725	1380x480x725	1680x480x725
Doors	Solid lid	Solid lid	Solid lid	Solid lid	Solid lid
Shelves/Baskets	1 basket	1 basket	2 baskets	2 baskets	3 baskets
Outer Body	White	White	White	White	White
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	4 castors	4 castors	4 castors	4 castors	4 castors
Lock	Y	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	100	120	150	150	220
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	43	50	59	66	73
Net Weight, kg	39,5	46,5	55	61	68
Noise Level dbA	42	42	42	42	42
Type of Cooling	Static	Static	Static	Static	Static
Type of Defrost	Manual	Manual	Manual	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a	R134a
Charge, g	80	105	160	190	250
Internal Light	N	N	10 W	10 W	10 W

## » Chest freezers



### FR605S

- Stainless steel lid
- Handle with lock
- Defrost water drain
- Thermometer included
- Inner liner of stucco aluminium
- Internal light
- 3 baskets included
- 4 castors included



**FR405S**

- Stainless steel lid
- Handle with lock
- Defrost water drain
- Thermometer included
- Inner liner of stucco aluminium
- 4 castors included
- 2 baskets included



**FR505S**

- Stainless steel lid
- Handle with lock
- Defrost water drain
- Thermometer included
- Inner liner of stucco aluminium
- 4 castors included
- 2 baskets included

## Technical specifications

Model	FR205S	FR305S	FR405S	FR505S	FR605S
Climate Class	T	T	T	T	T
Temperature Range, °C	-14 to -24	-14 to -24	-14 to -24	-14 to -24	-14 to -24
Gross Volume, l	189	278	385	463	567
Net Volume, l	185	273	377	454	557
External Dimensions, WxDxH	734x700x945	984x700x945	1284x700x945	1504x700x945	1804x700x945
Internal Dimensions, WxDxH	610x480x725	860x480x725	1160x480x725	1380x480x725	1680x480x725
Doors	Solid lid, SS	Solid lid, SS	Solid lid, SS	Solid lid, SS	Solid lid, SS
Shelves/Baskets	1 basket	1 basket	2 baskets	2 baskets	3 baskets
Outer Body	White, SS lid	White, SS lid	White, SS lid	White, SS lid	White, SS lid
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	4 castors	4 castors	4 castors	4 castors	4 castors
Lock	Y	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	100	120	150	150	220
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	43	50	59	66	73
Net Weight, kg	40	47	55	61	68
Noise Level dbA	42	42	42	42	42
Type of Cooling	Static	Static	Static	Static	Static
Type of Defrost	Manual	Manual	Manual	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a	R134a
Charge, g	80	105	160	190	250
Internal Light	N	N	N	N	N

## » Chest freezers



### CF700S

- Stainless steel lid
- Fast and high freezing capacity
- Handle with lock
- Internal light
- 1 baskets included
- Control panel with alarm
- 4 castors, 2 with brake
- Defrost water drain
- Service free built-in condenser



### CF700

- Fast and high freezing capacity
- Handle with lock
- Internal light
- 1 basket included
- Control panel with alarm
- 4 castors, 2 with brake
- Defrost water drain
- Service free built-in condenser

## Technical specifications

Model	CF700	CF700S
Climate Class	T	T
Temperature Range, °C	-14 to -24	-14 to -24
Gross Volume, l	675	675
Net Volume, l	646	646
External Dimensions, WxDxH	2060x716x830	2060x716x830
Internal Dimensions, WxDxH	1935x510x685	1935x510x685
Doors	Solid lid	Solid lid, SS
Shelves/Baskets	1 basket	1 basket
Outer Body	White	White
Interior	Stucco Aluminium	Stucco Aluminium
Castors/Feet	2 with, 2 without brake	2 with, 2 without brake
Lock	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50
Input Power, W	391	391
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	107	107
Net Weight, kg	101	101
Noise Level dbA	45	45
Type of Cooling	Static	Static
Type of Defrost	Manual	Manual
Controller	Mechanical	Mechanical
Thermometer	Y	Y
Refrigerant	R404a	R404a
Charge, g	290	290
Internal Light	10 W	10 W

## » Upright Freezers

The UFFS/UFSC Freezers match the popular bottle coolers series FS/SCU. They are available with solid door or glass door and with or without illuminated canopy. As the bottle coolers, these freezers are well suited for branding.

The smaller UF50/100G merchandising models with glass door can be placed on counters for a better display of products, and are also available with illuminated canopy.

Please note our new large upright freezer NF5000G on page 123.





## » Upright freezers



### NF2500G

- LED illuminated canopy
- Ventilated cooling
- Interior LED light
- Digital temperature display
- 5 adjustable shelves
- Adjustable feet
- Automatic defrost
- Lock
- Self-closing door
- Option: Customized decoration



#### UFSC1450GCP

- Illuminated canopy
- Fan assisted cooling
- Interior light
- Digital temperature display
- 6 fixed freezing shelves
- Adjustable feet
- Defrost water drain
- Lock
- Replaceable door gasket
- Option: Customized decoration



#### NF5000G

- LED illuminated canopy
- Ventilated cooling
- Interior LED light
- Digital temperature display
- 10 adjustable shelves
- Adjustable feet
- Automatic defrost
- Lock
- 2 Self-closing doors
- Option: Customized decoration

## Technical specifications

Model	NF2500G	NF5000G	UFFS1450GCP	UFSC1450GCP
Climate Class	N	N	N	N
Temperature Range, °C	-12 - -24	-12 - -24	-12 to -22	-12 to -22
Gross Volume, l	444	984	480	480
Net Volume, l	412	930	353	353
External Dimensions, WxDxH	680x720x1990	1370x720x1990	680x655x2090	680x655x2090
Internal Dimensions, WxDxH	560x580x1270	1250x580x1270	577x495x1684	577x495x1684
Doors	1 self closing glass	2 self closing glass	1 glass	1 glass
Shelves/Baskets	5 adjustable	10 adjustable	6	6
Outer Body	White	White	White	White
Interior	Coated steel	Coated steel	Aluminium	Aluminium
Castors/Feet	2 rollers and 2 feet	2 rollers and 2 feet	2 adjustable feet	2 adjustable feet
Lock	Y	Y	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	1000	1100	867	867
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	149	242	130	130
Net Weight, kg	138	227	117	117
Noise Level dbA	48	48	48	48
Type of Cooling	Ventilated	Ventilated	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Manual	Manual
Controller	Digital	Digital	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y
Refrigerant	R404a	R404a	R404a	R404a
Charge, g	460	880	325	325
Internal Light	LED	LED	36 W Neon	36 W Neon
Canopy Light	LED	LED	18 W Neon	18 W Neon

## » Upright freezers



### UFFS370GCP glass door

- Illuminated canopy
- Fan assisted cooling
- Interior light
- Digital temperature display
- 6 fixed freezing shelves
- Adjustable feet
- Defrost water drain
- Lock
- Replaceable door gasket
- Option: Customized decoration



#### UFFS370G glass door

- Fan assisted cooling
- Interior light
- Digital temperature display
- 6 fixed freezing shelves
- Adjustable feet
- Defrost water drain
- Lock
- Replaceable door gasket
- Option: Customized decoration



#### UFFS370SD solid door

- Digital temperature display
- 6 fixed freezing shelves
- Adjustable feet
- Defrost water drain
- Lock
- Replaceable door gasket
- Option: Customized decoration

## Technical specifications

Model	UFFS370G	UFFS370GCP	UFFS370SD
Climate Class	N	N	N
Temperature Range, °C	-13 to -23	-13 to -23	-14 to -24
Gross Volume, l	300	300	300
Net Volume, l	270	270	270
External Dimensions, WxDxH	595x640x1840	595x640x1980	595x640x1840
Internal Dimensions, WxDxH	470x440x1545	470x440x1545	470x440x1545
Doors	1 glass	1 glass	1 solid
Shelves/Baskets	6 fixed freezing	6 fixed freezing	6 fixed freezing
Outer Body	White	White	White
Interior	ABS	ABS	ABS
Castors/Feet	2 adjustable feet	2 adjustable feet	2 adjustable feet
Lock	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	570	570	270
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	94	97	85,5
Net Weight, kg	86	89	80
Noise Level dbA	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Static
Type of Defrost	Manual	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y
Refrigerant	R404a	R404a	R404a
Charge, g	190	190	190
Internal Light	15 W Neon	15 W Neon	15 W Neon
Canopy Light	N	15 W Neon	N

## » Upright freezers



Lock as standard

### UFSC370SD solid door

- Digital temperature display
- 6 fixed freezing shelves
- Adjustable feet
- Defrost water drain
- Lock
- Replaceable door gasket
- Option: Customized decoration



#### UFSC370G glass door

- Fan assisted cooling
- Interior light
- Digital temperature display
- 6 fixed freezing shelves
- Adjustable feet
- Defrost water drain
- Lock
- Replaceable door gasket
- Option: Customized decoration



#### UFSC370GCP glass door

- Illuminated canopy
- Fan assisted cooling
- Interior light
- Digital temperature display
- 6 fixed freezing shelves
- Adjustable feet
- Defrost water drain
- Lock
- Replaceable door gasket
- Option: Customized decoration

## Technical specifications

Model	UFSC370G	UFSC370GCP	UFSC370SD
Climate Class	N	N	N
Temperature Range, °C	-13 to -23	-13 to -23	-14 to -24
Gross Volume, l	300	300	300
Net Volume, l	270	270	270
External Dimensions, WxDxH	595x640x1840	595x640x1980	595x640x1840
Internal Dimensions, WxDxH	470x440x1545	470x440x1545	470x440x1545
Doors	1 glass	1 glass	1 solid
Shelves/Baskets	6 fixed freezing	6 fixed freezing	6 fixed freezing
Outer Body	White	White	White
Interior	ABS	ABS	ABS
Castors/Feet	2 adjustable feet	2 adjustable feet	2 adjustable feet
Lock	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	570	570	270
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	94	97	85,5
Net Weight, kg	86	89	80
Noise Level dbA	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Static
Type of Defrost	Manual	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y
Refrigerant	R404a	R404a	R404a
Charge, g	190	190	190
Internal Light	15 W Neon	15 W Neon	15 W Neon
Canopy Light	N	15 W Neon	N

## » Upright freezers



### UF100G

- Interior LED light
- Self-closing tripple glazed door
- 3 Adjustable shelves
- Adjustable feet
- Aluminium interior
- Lock
- Replaceable door gasket





**UF50GCP**

- LED illuminated canopy
- Interior LED light
- Self-closing tripple glazed door
- 2 Adjustable shelves
- Adjustable feet
- Aluminium interior
- Lock
- Replaceable door gasket



**UF100GCP**

- LED illuminated canopy
- Interior LED light
- Self-closing tripple glazed door
- 3 Adjustable shelves
- Adjustable feet
- Aluminium interior
- Lock
- Replaceable door gasket

## Technical specifications

Model	UF50G	UF50GCP	UF100G	UF100GCP
Climate Class	N	N	N	N
Temperature Range, °C	-12 - -24	-12 - -24	-12 - -24	-12 - -24
Gross Volume, l	50	50	90	116
Net Volume, l	48	48	88	113
External Dimensions, WxDxH	570x530x520	570x530x657	610x540x670	610x555x890
Internal Dimensions, WxDxH	450x420x380	450x420x380	500x430x540	500x430x540
Doors	1 self closing glass	1 self closing glass	1 self closing glass	1 self closing glass
Shelves/Baskets	2 coated	2 coated	3 coated	3 coated
Outer Body	White	White	White	White
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Lock	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	154	154	230	230
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	45	49	54	58
Net Weight, kg	40	44	49	53
Noise Level dbA	45	45	45	45
Type of Cooling	Static	Static	Static	Static
Type of Defrost	Manual	Manual	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	N	N	N	N
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	110	110	135	135
Internal Light	LED	LED	LED	LED
Canopy Light	N	LED	N	LED

## » Upright freezers



### UF200S

- Stainless steel exterior
- White inner liner
- Lock fitted as standard
- Reversible door
- 3 Fixed shelves
- Adjustable feet at front, rollers at back
- Static cooling
- Digital thermometer
- Option: Wheels or adjustable legs



#### UF400S

- Stainless steel exterior
- White inner liner
- Lock fitted as standard
- Reversible door
- 7 Fixed freezing shelves
- Adjustable feet at front, rollers at back
- Static cooling
- Digital thermometer
- Option: Wheels or adjustable legs



#### UF600

- White cabinet
- White inner liner
- Lock fitted as standard
- Reversible door
- 7 Fixed shelves GN2/1
- Adjustable feet at front, rollers at back
- Static cooling
- Digital thermometer
- Option: Wheels or adjustable legs

## Technical specifications

Model	UF200	UF200S	UF400	UF400S	UF600	UF600S
Climate Class	N	N	N	N	N	N
Temperature Range, °C	-10 to -24	-10 to -24	-10 to -24	-10 to -24	-10 to -24	-10 to -24
Gross Volume, l	200	200	400	400	600	600
Net Volume, l	120	120	340	340	555	555
External Dimensions, WxDxH	600x600x850	600x600x850	600x600x1850	600x600x1850	770x750x1900	770x750x1900
Internal Dimensions, WxDxH						
Doors	1 solid White	1 solid SS430	1 solid White	1 solid SS430	1 solid White	1 solid SS430
Shelves/Baskets	3 fixed freezing	3 fixed freezing	7 fixed freezing	7 fixed freezing	7 fixed freezing, GN2/1	7 fixed freezing, GN2/1
Outer Body	White	SS430	White	SS430	White	SS430
Interior	ABS	ABS	ABS	ABS	ABS	ABS
Castors/Feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet
Lock	Y	Y	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	150	150	210	210	350	350
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	50	50	79	79	101	101
Net Weight, kg	45	45	74	74	94	94
Noise Level dbA	40	40	40	40	40	40
Type of Cooling	Static	Static	Static	Static	Static	Static
Type of Defrost	Manual	Manual	Manual	Manual	Manual	Manual
Controller	Digital	Digital	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a	R134a	R134a
Charge, g	75	75	185	185	290	290
Internal Light	N	N	N	N	N	N

## » Upright freezers



### BA10UF

- Interior LED light
- Fan assisted cooling
- Aluminium door frame
- Double glazed door
- 2 adjustable shelves
- Adjustable feet
- Digital thermometer



#### RF400G

- Stainless steel cabinet
- Grey inner liner
- Lock fitted as standard
- Reversible door
- 7 fixed freezing shelves
- Adjustable legs
- Digital thermometer



#### RF400

- Stainless steel cabinet
- Grey inner liner
- Lock fitted as standard
- Reversible door
- 7 fixed freezing shelves
- Adjustable legs
- Digital thermometer

## Technical specifications

Model	BA10UF	RF400G	RF400
Climate Class	N	N	N
Temperature Range, °C	-14 to -22	-14 to -24	-14 to -24
Gross Volume, l	124	300	300
Net Volume, l	118	270	270
External Dimensions, WxDxH	600x520x900	595x640x1920	595x640x1920
Internal Dimensions, WxDxH	508x355x732	470x440x1545	470x440x1545
Doors	1 hinged glass	1 hinged glass	1 hinged solid SS304
Shelves/Baskets	2, 496x350	6 fixed freezing	6 fixed freezing
Outer Body	Black	SS430	SS430
Interior	Stucco Aluminium	ABS	ABS
Castors/Feet	4 adjustable feet	4 adjustable legs	4 adjustable legs
Lock	N	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	310	345	345
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	49	88	86
Net Weight, kg	47	80	80
Noise Level dbA	45	45	45
Type of Cooling	Fan assisted	Static	Static
Type of Defrost	Automatic	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical
Thermometer	N	Y	Y
Refrigerant	R134a	R404a	R404a
Charge, g	-	190	190
Internal Light	LED	15 W Neon	N

## Domestic

The FR-freezers are domestic chest freezers in five different sizes, all available with stainless steel lid as option. Internal baskets are included in all models.

These models are available as either A+ with 80 mm insulation or A++ with 100 mm insulation for a lower energy consumption.





Domestic

## » Chest freezers A+ ECO-Friendly



### FR200LE

- Low energy consumption
- 80 mm insulation
- Handle with lock
- Internal light
- 1 basket included
- Control panel with alarm
- 4 sliding feet
- Defrost water drain





#### FR350LE

- Low energy consumption
- 80 mm insulation
- Handle with lock
- Internal light
- 1 basket included
- Control panel with alarm
- 4 sliding feet
- Defrost water drain



#### FR450LE

- Low energy consumption
- 80 mm insulation
- Handle with lock
- Internal light
- 1 baskets included
- Control panel with alarm
- 4 sliding feet
- Defrost water drain

## Technical specifications

Model	FR200LE	FR250LE	FR350LE	FR450LE
Climate Class	T	T	T	T
Temperature Range, °C	-15 to -25	-15 to -25	-15 to -25	-15 to -25
Gross Volume, l	156	236	330	402
Net Volume, l	150	227	323	388
External Dimensions, WxDxH	734x700x895	984x700x895	1284x700x895	1504x700x895
Internal Dimensions, WxDxH	570x440x705	820x440x705	1120x440x705	1340x440x705
Doors	Solid lid	Solid lid	Solid lid	Solid lid
Shelves/Baskets	1 basket	1 basket	1 basket	1 basket
Outer Body	White	White	White	White
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	Sliding shoes	Sliding shoes	Sliding shoes	Sliding shoes
Lock	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	75	75	75	85
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	48	53	63	71
Net Weight, kg	45,5	51	61	68
Noise Level dbA	39	39	39	39
Type of Cooling	Static	Static	Static	Static
Type of Defrost	Manual	Manual	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	N	N	N	N
Refrigerant	R600a	R600a	R600a	R600a
Charge, g	42	55	70	85
Internal Light	Y	Y	Y	Y



Domestic

## » Chest freezers A++ ECO-Friendly



### FR310SLE

- Low energy consumption
- 100 mm insulation
- Handle with lock
- Internal light
- 1 basket included
- Control panel with alarm
- 4 sliding feet
- Defrost water drain



#### FR210SLE

- Low energy consumption
- 100 mm insulation
- Handle with lock
- Internal light
- 1 basket included
- Control panel with alarm
- 4 sliding feet
- Defrost water drain



#### FR410SLE

- Low energy consumption
- 100 mm insulation
- Handle with lock
- Internal light
- 1 basket included
- Control panel with alarm
- 4 sliding feet
- Defrost water drain

## Technical specifications

Model	FR210SLE	FR310SLE	FR410SLE
Climate Class	T	T	T
Temperature Range, °C	-15 to -25	-15 to -25	-15 to -25
Gross Volume, l	190	272	332
Net Volume, l	186	266	325
External Dimensions, WxDxH	984x700x895	1284x700x895	1504x700x895
Internal Dimensions, WxDxH	780x400x665	1080x400x665	1300x400x665
Doors	Solid lid	Solid lid	Solid lid
Shelves/Baskets	1 basket	1 basket	2 baskets
Outer Body	White	White	White
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	Sliding shoes	Sliding shoes	Sliding shoes
Lock	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	45	45	45
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	53	62	70
Net Weight, kg	49,5	58	66,5
Noise Level dbA	39	39	39
Type of Cooling	Static	Static	Static
Type of Defrost	Manual	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical
Thermometer	N	N	N
Refrigerant	R600a	R600a	R600a
Charge, g	50	60	70
Internal Light	Y	Y	Y

## Gastroline

### Stainless Steel Products

The Tefcold Gastro Line range is produced with focus on high quality steel and easy maintenance and offers a wide diversity of options.

Both Gastronorm and Euronorm standard counters are available, and we are pleased to introduce our new line of Undercounters.

Pizza Tables produced in stainless steel and granite are available in many different sizes, with or without drawers. Several models are delivered with refrigerated topping units.

The Saladette range is suitable for Gastronorm pans, and is available with or without hinged lid and saladette well. The Sandwich Table range accepts Gastronorm pans in the refrigerated topping section. Drawers are offered as option, and glass structures for protection/display of food can be supplied for some of the models.

The Upright range offers a variety of options for combining matching Refrigerators and Freezers. Cabinets for both Gastronorm and Euronorm trays are offered, as well as special cabinets for storage of ice cream or fish. Several products are available with glass doors or with double- or half-doors.

The Chilled Topping Units are offered in different sizes suitable for any purpose. Each model accepts Gastronorm pans and is delivered with either glass structure for better display and protection of toppings or with stainless steel lid.

“Please see page 200 for ideas on how to place and combine GN-pans in our products”.





## » Snack freezer / Chiller



Lock and digital thermometer



Bottom shelf available

### RF500 SNACK

- Stainless steel exterior
- Lock fitted as standard
- Reversible self-closing door
- 3 adjustable shelves
- 4 adjustable feet
- Static cooling
- Digital thermometer



#### RK500 SNACK

- Stainless steel exterior
- Lock fitted as standard
- Reversible self-closing door
- 3 Adjustable shelves
- 4 adjustable feet
- Fan assisted cooling
- Automatic defrost
- Digital thermometer



#### RKS600 FISH

- Stainless steel exterior
- Lock fitted as standard
- Reversible self-closing door
- 8 trays for fish
- 4 castors, 2 with brake
- Static cooling
- Manual defrost
- Digital thermometer
- Option: Adjustable legs

## Technical specifications

Model	RF500 SNACK	RK500 SNACK	RKS600 FISH
Climate Class	ST	ST	ST
Temperature Range, °C	-10 to -20	-2 to 8	-6 to 8
Gross Volume, l	450	450	560
Net Volume, l	429	429	507
External Dimensions, WxDxH	680x700x1900	680x700x1900	680x810x2010
Internal Dimensions, WxDxH	560x553x1380	560x553x1380	560x653x1396
Doors	1 self closing solid	1 self closing solid	1 self closing solid
Shelves/Baskets	3	3	8 trays
Outer Body	SS304	SS304	SS304
Interior	SS304	SS304	SS304
Castors/Feet	4 adjustable feet	4 adjustable feet	2 with, 2 without brake
Lock	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	600	300	456
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	140	140	145
Net Weight, kg	130	130	135
Noise Level dbA	42	42	48
Type of Cooling	Static	Fan assisted	Static
Type of Defrost	Manual	Automatic	Manual
Controller	Digital	Digital	Digital
Thermometer	Y	Y	Y
Refrigerant	R404a	R134a	R134a
Charge, g	390	-	-
Internal Light	N	N	N



## » Upright freezer / Chiller



### RK505

- Stainless steel exterior
- Lock fitted as standard
- Reversible self-closing door
- 3 Adjustable shelves
- 4 castors, 2 with brake
- Ventilated cooling
- Automatic defrost
- Digital thermometer





#### RK1010

- Stainless steel exterior
- Lock fitted as standard
- 2 self-closing doors
- 6 Adjustable shelves
- 4 castors, 2 with brake
- Ventilated cooling
- Automatic defrost
- Digital thermometer

### Technical specifications

Model	RF505	RF1010	RK505	RK1010
Climate Class, N,SN,ST,T	ST	ST	ST	ST
Temperature Range, °C	-18 to -24	-18 to -24	-2 to 8	-2 to 8
Gross Volume, l	466	976	466	976
Net Volume, l	429	900	429	900
External Dimensions, WxDxH	680x710x2010	1340x710x2010	680x710x2010	1340x710x2010
Internal Dimensions, WxDxH	560x553x1386	1220x553x1386	560x553x1386	1220x553x1386
Doors	1 solid SS304	2 solid SS304	1 solid SS304	2 solid SS304
Shelves/Baskets	3 coated steel	6 coated steel	3 coated steel	6 coated steel
Outer Body	SS304	SS304	SS304	SS304
Interior	SS304	SS304	SS304	SS304
Castors/Feet	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake
Lock	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	600	1000	300	650
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	145	195	145	195
Net Weight, kg	135	180	135	180
Noise Level dbA	45	45	45	45
Type of Cooling	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y
Refrigerant	R404a	R404a	R134a	R134a
Charge, g	390	500	210	320
Internal Light	N	N	N	N



# » Upright freezer / Chiller GN2/1



Kits for Euronorm available



Castor with brake

## RK710G

- Stainless steel exterior
- Lock fitted as standard
- Reversible self-closing glass door
- 3 Adjustable GN2/1 shelves
- Interior light
- 4 castors, 2 with brake
- Ventilated cooling
- Automatic defrost
- Digital thermometer
- Option: Adjustable legs



**RF710**

- Stainless steel exterior
- Lock fitted as standard
- Reversible self-closing door
- 3 Adjustable GN2/1 shelves
- Interior light
- 4 castors, 2 with brake
- Ventilated cooling
- Automatic defrost
- Digital thermometer
- Option: Adjustable legs



**RK1420**

- Stainless steel exterior
- Lock fitted as standard
- 2 self-closing doors
- 6 Adjustable GN2/1 shelves
- Suitable for fresh meat (-2/+2)
- 4 castors, 2 with brake
- Ventilated cooling
- Automatic defrost
- Digital thermometer
- Option: Adjustable legs

## Technical specifications

Model	RF710	RF1420	RK710	RK1420	RK710G	RK1420G
Climate Class	ST	ST	ST	ST	ST	ST
Temperature Range, °C	-18 to -24	-18 to -24	-2 to 10	-2 to 10	2 to 10	2 to 10
Gross Volume, l	650	1410	650	1410	650	1410
Net Volume, l	597	1325	597	1325	597	1325
External Dimensions, WxDxH	740x850x2010	1480x850x2010	740x850x2010	1480x850x2010	740x850x2010	1480x850x2010
Internal Dimensions, WxDxH	624x685x1396	1360x685x1396	624x685x1396	1360x685x1396	624x685x1396	1360x685x1396
Doors	1 self closing solid	2 self closing solid	1 self closing solid	2 self closing solid	1 self closing glass	2 self closing glass
Shelves/Baskets	3, GN2/1	6, GN2/1	3, GN2/1	6, GN2/1	3, GN2/1	6, GN2/1
Outer Body	SS304	SS304	SS304	SS304	SS304	SS304
Interior	SS304	SS304	SS304	SS304	SS304	SS304
Castors/Feet	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake
Lock	Y	Y	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	1000	1000	456	650	456	650
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	147	220	143	213	143	213
Net Weight, kg	138	198	134	198	134	198
Noise Level dbA	48	48	48	48	48	48
Type of Cooling	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y	Y	Y
Refrigerant	R404a	R404a	R134a	R134a	R134a	R134a
Charge, g	460	500	300	500	300	500
Internal Light	25 W	2x25 W	25 W	2x25 W	25 W	2x25 W



## » Upright freezer / Chiller



### UF550S

- Stainless steel exterior
- White inner liner
- Lock fitted as standard
- Reversible door
- 7 Fixed shelves
- Adjustable feet
- Static cooling
- Digital thermometer
- Option: Baskets



#### UR550S

- Stainless steel cabinet
- White inner liner
- Lock fitted as standard
- Reversible door
- 4 Adjustable shelves
- Adjustable feet
- Fan assisted cooling
- Automatic defrost
- Digital thermometer



#### UF550

- White exterior
- White inner liner
- Lock fitted as standard
- Reversible door
- 7 Fixed shelves
- Adjustable feet
- Static cooling
- Digital thermometer
- Option: Baskets

## Technical specifications

Model	UR550	UR550S	UF550	UF550S
Climate Class	ST	ST	ST	ST
Temperature Range, °C	0 to 10	0 to 10	-10 to -24	-10 to -24
Gross Volume, l	560	560	560	560
Net Volume, l	520	520	506	506
External Dimensions, WxDxH	777x720x1720	777x720x1720	777x720x1720	777x720x1720
Internal Dimensions, WxDxH	600x555x1469	600x555x1469	600x555x1469	600x555x1469
Doors	1 solid white	1 solid SS430	1 solid white	1 solid SS430
Shelves/Baskets	4 adjustable	4 adjustable	7 fixed freezing	7 fixed freezing
Outer Body	White	SS430	White	SS430
Interior	ABS	ABS	ABS	ABS
Castors/Feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet
Lock	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	250	250	350	350
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	92	92	92	92
Net Weight, kg	85	85	85	85
Noise Level dbA	45	45	45	45
Type of Cooling	Static	Static	Static	Static
Type of Defrost	Automatic	Automatic	Manual	Manual
Controller	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	200	200	200	200
Internal Light	N	N	N	N



## » Upright freezer / Chiller GN2/1



### UR600S

- Stainless steel exterior
- White inner liner
- Lock fitted as standard
- Reversible door
- 4 Adjustable shelves GN2/1
- Adjustable feet at front, rollers at back
- Fan assisted cooling
- Automatic defrost
- Digital thermometer
- Option: Wheels or adjustable legs



#### UF600

- White cabinet
- White inner liner
- Lock fitted as standard
- Reversible door
- 7 Fixed shelves GN2/1
- Adjustable feet at front, rollers at back
- Static cooling
- Digital thermometer
- Option: Wheels or adjustable legs



#### UR600

- White cabinet
- White inner liner
- Lock fitted as standard
- Reversible door
- 4 Adjustable shelves GN2/1
- Adjustable feet at front, rollers at back
- Fan assisted cooling
- Automatic defrost
- Digital thermometer
- Option: Wheels or adjustable legs

## Technical specifications

Model	UF600	UF600S	UR600	UR600S
Climate Class	N	N	N	N
Temperature Range, °C	-10 to -24	-10 to -24	0 to 10	0 to 10
Gross Volume, l	600	600	600	600
Net Volume, l	555	555	570	570
External Dimensions, WxDxH	770x750x1900	770x750x1900	770x750x1900	770x750x1900
Internal Dimensions, WxDxH	-	-	-	-
Doors	1 solid White	1 solid SS430	1 solid White	1 solid SS430
Shelves/Baskets	7 fixed freezing, GN2/1	7 fixed freezing, GN2/1	3, GN2/1 and 1, 650x305	3, GN2/1 and 1, 650x305
Outer Body	White	SS430	White	SS430
Interior	ABS	ABS	ABS	ABS
Castors/Feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet
Lock	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	350	350	200	200
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	101	101	97	97
Net Weight, kg	94	94	90	90
Noise Level dbA	40	40	40	40
Type of Cooling	Static	Static	Fan assisted	Fan assisted
Type of Defrost	Manual	Manual	Automatic	Automatic
Controller	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	290	290	210	210
Internal Light	N	N	N	N



# » Gastronorm Counters GN1/1



## CK7210

- 1/1 Gastronorm Cupboards
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Ventilated cooling
- Automatic defrost
- 2 self-closing doors
- Splashback fitted as standard
- Removeable table top
- Adjustable legs
- Digital temperature display
- Drawers available as separate kits
- Matching freezer available



Available without splash back



Set of 2 drawers as separate kit



Set of 3 drawers as separate kit





### CK7410

- 1/1 Gastronorm Cupboards
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Ventilated cooling
- Automatic defrost
- 4 self-closing doors
- Splashback fitted as standard
- Removeable table top
- Adjustable legs
- Digital temperature display
- Drawers available as separate kits
- Matching freezer available

## Technical specifications

Model	CK7210	CK7310	CK7410
Climate Class	ST	ST	ST
Temperature Range, °C	-2 to 10	-2 to 10	-2 to 10
Gross Volume, l	282	417	553
Net Volume, l	272	402	533
External Dimensions, WxDxH	1360x700x950	1795x700x950	2230x700x950
Internal Dimensions, WxDxH	902x530x589	1337x530x589	1772x530x589
Doors	2 solid	3 solid	4 solid
Shelves/Baskets	2, GN1/1	2, GN1/1	3, GN1/1
Outer Body	SS304	SS304	SS304
Interior	SS304	SS304	SS304
Castors/Feet	4 adjustable legs	4 adjustable legs	6 adjustable legs
Lock	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	230	230	280
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	108	149	173
Net Weight, kg	98	134	153
Noise Level dbA	42	42	42
Type of Cooling	Ventilated	Ventilated	Ventilated
Type of Defrost	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital
Thermometer	Y	Y	Y
Refrigerant	R134a	R134a	R134a
Charge, g	230	230	250
Internal Light	N	N	N



## » Gastronorm Counters GN1/1



### CK7210G

- 1/1 Gastronorm Cupboards
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Ventilated cooling
- Automatic defrost
- 2 self-closing glass doors
- Internal LED light
- Removeable table top
- Adjustable legs
- Digital temperature display



### CK7310G

- 1/1 Gastronorm Cupboards
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Ventilated cooling
- Automatic defrost
- 3 self-closing glass doors
- Internal LED light
- Removeable table top
- Adjustable legs
- Digital temperature display

## Technical specifications

Model	CK7210G	CK7310G	CK7410G
Climate Class	ST	ST	ST
Temperature Range, °C	2 to 10	2 to 10	2 to 10
Gross Volume, l	282	417	553
Net Volume, l	272	402	533
External Dimensions, WxDxH	1360x700x850	1795x700x850	2230x700x850
Internal Dimensions, WxDxH	902x530x589	1337x530x589	1772x530x589
Doors	2 glass	3 glass	4 glass
Shelves/Baskets	2, GN1/1	3, GN1/1	4, GN1/1
Outer Body	SS304	SS304	SS304
Interior	SS304	SS304	SS304
Castors/Feet	4 adjustable legs	4 adjustable legs	6 adjustable legs
Lock	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	230	230	280
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	118	164	193
Net Weight, kg	108	149	173
Noise Level dbA	42	42	42
Type of Cooling	Ventilated	Ventilated	Ventilated
Type of Defrost	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital
Thermometer	Y	Y	Y
Refrigerant	R134a	R134a	R134a
Charge, g	230	230	250
Internal Light	LED	LED	LED



# » Gastronorm Counters GN1/1



## CF7210

- 1/1 Gastronorm Cupboards
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Ventilated cooling
- Automatic defrost
- 2 self-closing doors
- Splashback fitted as standard
- Removeable table top
- Adjustable legs
- Digital temperature display
- Drawers available as separate kits
- Matching chiller available



Castors as option



Digital thermometer with clear blue display



Available without splash back



### CF7310

- 1/1 Gastronorm Cupboards
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Ventilated cooling
- Automatic defrost
- 3 self-closing doors
- Splashback fitted as standard
- Removeable table top
- Adjustable legs
- Digital temperature display
- Matching chiller available

## Technical specifications

Model	CF7210	CF7310	CF7410
Climate Class	ST	ST	ST
Temperature Range, °C	-10 to -20	-10 to -20	-10 to -20
Gross Volume, l	282	417	553
Net Volume, l	272	402	533
External Dimensions, WxDxH	1360x700x950	1795x700x950	2230x700x950
Internal Dimensions, WxDxH	902x530x589	1337x530x589	1772x530x589
Doors	2 solid	3 solid	4 solid
Shelves/Baskets	2, GN1/1	3, GN1/1	4, GN1/1
Outer Body	SS304	SS304	SS304
Interior	SS304	SS304	SS304
Castors/Feet	4 adjustable legs	4 adjustable legs	6 adjustable legs
Lock	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	700	700	700
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	150	165	180
Net Weight, kg	140	150	160
Noise Level dbA	45	45	45
Type of Cooling	Ventilated	Ventilated	Ventilated
Type of Defrost	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital
Thermometer	Y	Y	Y
Refrigerant	R404a	R404a	R404a
Charge, g	300	300	300
Internal Light	N	N	N



## » Snack Counters



### SK6210

- Stainless steel 304 interior
- Stainless steel 304 exterior
- Ventilated cooling
- Automatic defrost
- 2 self-closing doors
- 2 shelves
- Splashback as option
- Removeable table top
- Adjustable legs
- Digital temperature display
- Drawers available as separate kits



Set of 2 drawers as separate kit



Set of 3 drawers as separate kit



Castors as option



### SK6410

- Stainless steel 304 interior
- Stainless steel 304 exterior
- Ventilated cooling
- Automatic defrost
- 4 self-closing doors
- 4 shelves
- Splashback as option
- Removeable table top
- Adjustable legs
- Digital temperature display
- Drawers available as separate kits

## Technical specifications

Model	SK6210	SK6310	SK6410
Climate Class	ST	ST	ST
Temperature Range, °C	-2 to 10	-2 to 10	-2 to 10
Gross Volume, l	240	360	480
Net Volume, l	230	345	460
External Dimensions, WxDxH	1360x600x850	1795x600x850	2230x600x850
Internal Dimensions, WxDxH	902x430x589	1337x430x589	1772x430x589
Doors	1 solid, 2 drawers	2 solid, 3 drawers	4 solid
Shelves/Baskets	1, 328x430	2, 328x430	4, 328x430
Outer Body	SS304	SS304	SS304
Interior	SS304	SS304	SS304
Castors/Feet	4 adjustable legs	4 adjustable legs	6 adjustable legs
Lock	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	230	230	280
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	98	135	143
Net Weight, kg	88	120	123
Noise Level dbA	42	42	42
Type of Cooling	Ventilated	Ventilated	Ventilated
Type of Defrost	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital
Thermometer	Y	Y	Y
Refrigerant	R134a	R134a	R134a
Charge, g	230	230	250
Internal Light	N	N	N



# » Euronorm Bakery Counters



## BK210

- Euronorm Cupboards
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Ventilated cooling
- Automatic defrost
- 2 self-closing doors
- 2 shelves
- Removeable table top
- Adjustable legs
- Digital temperature display



Lock for compressor department



Set of 2 drawers as separate kit



Castors as option





### BK310

- Euronorm Cupboards
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Ventilated cooling
- Automatic defrost
- 3 self-closing doors
- 3 shelves
- Removeable table top
- Adjustable legs
- Digital temperature display

## Technical specifications

Model	BK210	BK310
Climate Class	ST	ST
Temperature Range, °C	2 to 10	2 to 10
Gross Volume, l	390	580
Net Volume, l	380	565
External Dimensions, WxDxH	1510x800x850	2020x800x850
Internal Dimensions, WxDxH	1052x630x589	1562x630x589
Doors	2 solid	3 solid
Shelves/Baskets	2, 400x600	3, 400x600
Outer Body	SS304	SS304
Interior	SS304	SS304
Castors/Feet	4 adjustable legs	4 adjustable legs
Lock	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50
Input Power, W	230	230
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	140	152
Net Weight, kg	130	137
Noise Level dbA	42	42
Type of Cooling	Ventilated	Ventilated
Type of Defrost	Automatic	Automatic
Controller	Digital	Digital
Thermometer	Y	Y
Refrigerant	R134a	R134a
Charge, g	230	250
Internal Light	N	N



## » Undercounters GN1/1



### UC5210

- 1/1 Gastronorm Cupboards
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Ventilated cooling
- Automatic defrost
- 2 self-closing doors
- Adjustable legs
- Digital temperature display



GN1/1 shelves



GN1/1 drawers



### UC5360

- 1/1 Gastronorm Cupboards
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Ventilated cooling
- Automatic defrost
- 6 drawers
- Adjustable legs
- Digital temperature display

## Technical specifications

Model	UC5210	UC5240	UC5310	UC5360	UC5410	UC5480
Climate Class	ST	ST	ST	ST	ST	ST
Temperature Range, °C	-2 - 8	-2 - 8	-2 - 8	-2 - 8	-2 - 8	-2 - 8
Gross Volume, l	180	180	277	277	370	370
Net Volume, l	170	170	262	262	350	350
External Dimensions, WxDxH	1360x700x650	1360x700x650	1795x700x650	1795x700x650	2230x700x650	2230x700x650
Internal Dimensions, WxDxH	-	-	-	-	-	-
Doors	2 hinged	4 drawers	3 hinged	6 drawers	4 hinged	8 drawers
Shelves/Baskets	2, GN1/1	0	3, GN1/1	0	4, GN1/1	0
Outer Body	SS304	SS304	SS304	SS304	SS304	SS304
Interior	SS304	SS304	SS304	SS304	SS304	SS304
Castors/Feet	4 adjustable legs	4 adjustable legs	4 adjustable legs	4 adjustable legs	6 adjustable legs	6 adjustable legs
Lock	N	N	N	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	350	350	350	350	350	350
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	95	115	122	152	150	190
Net Weight, kg	82	102	106	136	130	170
Noise Level dbA	42	42	42	42	42	42
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a	R134a	R134a
Charge, g	230	230	230	230	250	250
Internal Light	N	N	N	N	N	N



## » Saladette Counters GN1/1



### SA912

- Gastronorm 1/1 cupboard
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Fan assisted cooling
- Automatic defrost
- 1 doors
- 1 GN1/1 shelves
- 2 Drawers
- Adjustable feet
- Digital temperature display



SA910

- Gastronorm 1/1 cupboard
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Fan assisted cooling
- Automatic defrost
- 2 doors
- 2 GN1/1 shelves
- Adjustable feet
- Digital temperature display



SA914

- Gastronorm 1/1 cupboard
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Fan assisted cooling
- Automatic defrost
- 4 Drawers
- Adjustable feet
- Digital temperature display

## Technical specifications

Model	SA910	SA910BT	SA912	SA914
Climate Class	ST	ST	ST	ST
Temperature Range, °C	2 to 10	-10 to -20	2 to 10	2 to 10
Gross Volume, l	260	230	260	260
Net Volume, l	230	200	230	230
External Dimensions, WxDxH	900x700x850	943x700x860	900x700x850	900x700x850
Internal Dimensions, WxDxH	830x515x500	830x515x415	830x515x500	830x515x500
Doors	2	2	1, 2 drawers	4 drawers
Shelves/Baskets	1 each door, GN1/1	1 each door, GN1/1	1 each door, GN1/1	0
Outer Body	SS304	SS304	SS304	SS304
Interior	SS304	SS304	SS304	SS304
Castors/Feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Lock	N	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	230	280	230	230
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	82	96	91	99
Net Weight, kg	72	86	81	89
Noise Level dbA	42	42	42	42
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	165		165	165
Internal Light	N	N	N	N



## » Saladette Counters GN1/1



### SA920

- Gastronorm 1/1 cupboard
- Hinged stainless cover for saladette well
- Polypropylene chopping board
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Fan assisted cooling
- Automatic defrost
- 2 doors
- 2 GN1/1 shelves
- Adjustable feet
- Digital temperature display



Glass top as option



**SA1045**

- Gastronorm 1/1 cupboard
- Hinged stainless cover for saladette well
- Polypropylene chopping board
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Fan assisted cooling
- Automatic defrost
- 2 doors
- 2 GN1/1 shelves
- Adjustable feet
- Digital temperature display



**SA1365**

- Gastronorm 1/1 cupboard
- Hinged stainless cover for saladette well
- Polypropylene chopping board
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Fan assisted cooling
- Automatic defrost
- 3 doors
- 3 GN1/1 shelves
- Adjustable feet
- Digital temperature display

## Technical specifications

Model	SA920	SA1045	SA1365	SA1365SS
Climate Class	ST	ST	ST	ST
Temperature Range, °C	2 to 10	2 to 10	2 to 10	2 to 10
Gross Volume, l	260	270	400	400
Net Volume, l	230	240	368	368
External Dimensions, WxDxH	900x700x850	1045x700x850	1365x700x850	1365x700x850
Internal Dimensions, WxDxH	830x515x500	975x515x500	1295x515x500	1295x515x500
Doors	2	2	3	3
Shelves/Baskets	1 each door, GN1/1	1 each door, GN1/1	1 each door, GN1/1	1 each door, GN1/1
Outer Body	SS304	SS304	SS304	SS304
Interior	SS304	SS304	SS304	SS304
Castors/Feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Lock	N	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	230	230	280	280
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	81	91	122	125
Net Weight, kg	70	80	107	108
Noise Level dbA	42	42	42	42
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	165	165	265	265
Internal Light	N	N	N	N



## » Sandwich Counters GN1/1



### SS920

- Gastronorm 1/1 cupboard
- Refrigerated topping well GN1/6
- Hinged lid for saladette well
- 2 doors
- 2 GN 1/1 shelves
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Fan assisted cooling
- Automatic defrost
- Adjustable feet
- Digital temperature display



Set of 2 drawers as separate kit





### SS1435

- Gastronorm 1/1 cupboard
- Refrigerated topping well GN1/6
- Hinged lid for saladette well
- 3 doors
- 3 GN 1/1 shelves
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Fan assisted cooling
- Automatic defrost
- Adjustable feet
- Digital temperature display

## Technical specifications

Model	SS920	SS1435
Climate Class	ST	ST
Temperature Range, °C	2 to 10	2 to 10
Gross Volume, l	228	348
Net Volume, l	201	320
External Dimensions, WxDxH	900x700x980	1365x700x980
Internal Dimensions, WxDxH	830x515x500	1295x515x500
Doors	2	3
Shelves/Baskets	1 each door, GN1/1	1 each door, GN1/1
Outer Body	SS304	SS304
Interior	SS304	SS304
Castors/Feet	4 adjustable feet	4 adjustable feet
Lock	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50
Input Power, W	230	230
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	94	140
Net Weight, kg	72	120
Noise Level dbA	42	42
Type of Cooling	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic
Controller	Digital	Digital
Thermometer	Y	Y
Refrigerant	R134a	R134a
Charge, g	165	265
Internal Light	N	N



## » Sandwich Counters



### SS7200

- Gastronorm 1/1 cupboard
- Refrigerated topping well GN1/3
- Hinged lid for saladette well
- 2 doors
- 2 GN 1/1 shelves
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Ventilated cooling
- Automatic defrost
- Adjustable legs
- Digital temperature display



Set of 2 drawers as separate kit



### SS8300

- Euronorm cupboard
- Refrigerated topping well GN1/3
- Hinged lid for saladette well
- 3 doors
- 3, 400x600 shelves
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Ventilated cooling
- Automatic defrost
- Adjustable legs
- Digital temperature display

## Technical specifications

Model	SS7200	SS7300	SS8200	SS8300
Climate Class	ST	ST	ST	ST
Temperature Range, °C	2 to 10	2 to 10	2 to 10	2 to 10
Gross Volume, l	320	429	362	520
Net Volume, l	297	407	337	497
External Dimensions, WxDxH	1360x700x1050	1795x700x1050	1510x800x1050	2020x800x1050
Internal Dimensions, WxDxH	920x530x589	1337x530x589	1052x630x589	1562x630x589
Doors	2 self closing	3 self closing	2 self closing	3 self closing
Shelves/Baskets	1 coated each door	1 coated each door	1 coated each door	1 coated each door
Outer Body	SS304	SS304	SS304	SS304
Interior	SS304	SS304	SS304	SS304
Castors/Feet	4 adjustable legs	4 adjustable legs	4 adjustable legs	4 adjustable legs
Lock	N	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	280	280	280	340
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	145	180	160	192
Net Weight, kg	125	155	140	164
Noise Level dbA	42	42	42	42
Type of Cooling	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	230	230	230	250
Internal Light	N	N	N	N



## » Pizza Counters GN1/1



### PT920

- Granite table top
- Suitable for GN pans (not supplied)
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Fan assisted cooling
- Automatic defrost
- 2 doors
- 2 GN1/1 shelves
- Adjustable feet
- Digital temperature display



PT930

- Granite table top
- Suitable for GN pans (not supplied)
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Fan assisted cooling
- Automatic defrost
- 3 doors
- 3 GN1/1 shelves
- Adjustable feet
- Digital temperature display



PT1365

- Granite table top
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Fan assisted cooling
- Automatic defrost
- 3 doors
- 3 GN1/1 shelves
- Adjustable feet
- Digital temperature display
- Topping unit designed for GN pans

## Technical specifications

Model	PT920	PT930	PT1365
Climate Class	ST	ST	ST
Temperature Range, °C	2 to 10	2 to 10	2 to 10
Gross Volume, l	260	400	400
Net Volume, l	230	368	368
External Dimensions, WxDxH	900x700x1100	1365x700x1100	1400x700x1415
Internal Dimensions, WxDxH	830x515x500	1295x515x500	1295x515x500
Doors	2	3	3
Shelves/Baskets	1 each door, GN1/1	1 each door, GN1/1	1 each door, GN1/1
Outer Body	SS304	SS304	SS304
Interior	SS304	SS304	SS304
Castors/Feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Lock	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	230	230	230
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	102	175	165
Net Weight, kg	90	155	148
Noise Level dbA	42	42	42
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital
Thermometer	Y	Y	Y
Refrigerant	R134a	R134a	R134a
Charge, g	165	265	265
Internal Light	N	N	N



## » Pizza Counters



### PT1200

- Granite table top
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Ventilated cooling
- Automatic defrost
- 2 doors
- 7 Pizza trays each door 400x600
- Adjustable legs
- Digital temperature display
- Topping unit designed for GN pans



Slides for pizza trays



7 ambient dough drawers on PT1310



#### PT1300

- Granite table top
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Ventilated cooling
- Automatic defrost
- 3 doors
- 7 Pizza trays each door 400x600
- Adjustable legs
- Digital temperature display
- Topping unit designed for GN pans

## Technical specifications

Model	PT1200	PT1300	PT1310
Climate Class	ST	ST	ST
Temperature Range, °C	2 to 10	2 to 10	2 to 10
Gross Volume, l	390	580	390
Net Volume, l	370	565	370
External Dimensions, WxDxH	1510x800x1415	2045x800x1415	2045x800x1415
Internal Dimensions, WxDxH	1052x630x589	1562x630x589	1052x630x589
Doors	2 self closing	3 self closing	2 self closing, 7 drawers
Shelves/Baskets	1 each door, 400x600	1 each door, 400x600	1 each door, 400x600
Outer Body	SS304	SS304	SS304
Interior	SS304	SS304	SS304
Castors/Feet	4 adjustable legs	4 adjustable legs	4 adjustable legs
Lock	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	280	280	280
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	275	340	380
Net Weight, kg	258	320	363
Noise Level dbA	42	42	42
Type of Cooling	Ventilated	Ventilated	Ventilated
Type of Defrost	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital
Thermometer	Y	Y	Y
Refrigerant	R134a	R134a	R134a
Charge, g	230	250	230
Internal Light	N	N	N



# » Refrigerated Topping Unit



## VK38-200

- Accepts GN1/3 pans (Not supplied)
- Stainless steel 304 interior
- Stainless steel 304 exterior
- Static cooling
- Glass structure for protection of food
- Adjustable feet
- Digital temperature display

## Technical specifications

Model	VK33-120	VK33-140	VK33-150	VK33-160	VK33-180	VK33-200
Climate Class	ST	ST	ST	ST	ST	ST
Temperature Range, °C	2 to 10	2 to 10	2 to 10	2 to 10	2 to 10	2 to 10
Gross Volume, l	32	42	44	48	55	63
Net Volume, l	32	40	44	48	55	63
Pans	-	-	-	-	-	-
External Dimensions, WxDxH	1200x335x225	1400x335x225	1500x335x225	1600x335x225	1800x335x225	2000x335x225
Internal Dimensions, WxDxH	845x245x155	1045x245x155	1145x245x155	1245x245x155	1445x245x155	1645x245x155
Doors	0	0	0	0	0	0
Shelves/Baskets	5, GN1/4 opt.	6, GN1/4 opt.	7, GN1/4 opt.	7, GN1/4 opt.	8, GN1/4 opt.	10, GN1/4 opt.
Outer Body	SS304	SS304	SS304	SS304	SS304	SS304
Interior	SS304	SS304	SS304	SS304	SS304	SS304
Castors/Feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Lock	N	N	N	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	340	340	340	340	340	340
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	27	29	31	32	34	36
Net Weight, kg	25	27	29	30	32	34
Noise Level dbA	47	47	47	47	47	47
Type of Cooling	Static	Static	Static	Static	Static	Static
Type of Defrost	Manual	Manual	Manual	Manual	Manual	Manual
Controller	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Thermometer	Y	Y	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a	R134a	R134a
Charge, g	120	130	130	135	145	155





Glass structure for protection of food



Stainless steel lid as option



Suited for Gastronorm pans



Digital thermometer with clear blue display

## Technical specifications

Model	VK38-120	VK38-150	VK38-160	VK38-180	VK38-200
Climate Class	ST	ST	ST	ST	ST
Temperature Range, °C	2 to 10	2 to 10	2 to 10	2 to 10	2 to 10
Gross Volume, l	40	54	59	69	78
Net Volume, l	40	54	59	69	78
Pans	-	-	-	-	-
External Dimensions, WxDxH	1200x395x225	1500x395x225	1600x395x225	1800x395x225	2000x395x225
Internal Dimensions, WxDxH	845x305x155	1145x305x155	1245x305x155	1445x305x155	1645x305x155
Doors	0	0	0	0	0
Shelves/Baskets	4, GN1/3 opt.	6, GN1/3 opt.	7, GN1/3 opt.	8, GN1/3 opt.	9, GN1/3 opt.
Outer Body	SS304	SS304	SS304	SS304	SS304
Interior	SS304	SS304	SS304	SS304	SS304
Castors/Feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Lock	N	N	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	340	340	340	340	340
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	30	33	34	36	38
Net Weight, kg	28	31	32	34	36
Noise Level dbA	47	47	47	47	47
Type of Cooling	Static	Static	Static	Static	Static
Type of Defrost	Manual	Manual	Manual	Manual	Manual
Controller	Electronic	Electronic	Electronic	Electronic	Electronic
Thermometer	Y	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a	R134a
Charge, g	120	130	135	145	155



# » Cooling Wells GN1/1



## CW3

- Stainless steel 304 interior
- Stainless steel 304 exterior
- Static cooling
- Digital temperature display
- Suitable for build-in

## Technical specifications

Model	CW2	CW3	CW4	CW5
Climate Class	ST	ST	ST	ST
Temperature Range, °C	2 to 8	2 to 8	2 to 8	2 to 8
Gross Volume, l	69	104	139	170
Net Volume, l	68	102	136	166
Pans	-	-	-	-
External Dimensions, WxDxH	768x678x536	1102x678x536	1436x678x536	1770x678x536
Build-in Dimensions, WxD	740x650	1075x650	1405x650	1740x650
Doors	N	N	N	N
Shelves/Baskets	2 x GN1/1 option	3 x GN1/1 option	4 x GN1/1 option	5 x GN1/1 option
Outer Body	SS304	SS304	SS304	SS304
Interior	SS304	SS304	SS304	SS304
Castors/Feet	N	N	N	N
Lock	N	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	250	250	250	250
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	42	47	52	58
Net Weight, kg	34	38	42	46
Noise Level dbA	42	42	42	42
Type of Cooling	Static	Static	Static	Static
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	-	-	-	-



Static cooling



Ventilated cooling

## Technical specifications

Model	CW2/V	CW3/V	CW4/V	CW5/V
Climate Class	ST	ST	ST	ST
Temperature Range, °C	2 to 8	2 to 8	2 to 8	2 to 8
Gross Volume, l	111	166	221	277
Net Volume, l	110	164	218	273
Pans	-	-	-	-
External Dimensions, WxDxH	788x688x636	1122x688x636	1456x688x636	1790x688x636
Build-in Dimensions, WxD	755x655	1090x655	1425x655	1755x655
Doors	N	N	N	N
Shelves/Baskets	2 x GN1/1 option	3 x GN1/1 option	4 x GN1/1 option	5 x GN1/1 option
Outer Body	SS304	SS304	SS304	SS304
Interior	SS304	SS304	SS304	SS304
Castors/Feet	N	N	N	N
Lock	N	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	280	280	280	280
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	46	52	58	64
Net Weight, kg	38	42	46	50
Noise Level dbA	42	42	42	42
Type of Cooling	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	-	-	-	-



# Bakery and Supermarket

Products for storage and display of food, pastry etc. for bakeries and supermarkets, all produced according to the Tefcold quality demands.

The SUPER-Series is a very flexible plug-in alternative to remote operated installations.

The UHD200 with 2 thermostats can be used as both chiller and freezer according to your customers needs.





## » Bakery



### Othello 100

- LED light for better display
- Black exterior
- Heated curved glass
- Ventilated cooling
- Self closing sliding doors
- 3 Glass shelves included
- Digital thermostat
- Easy clean interior
- Adjustable feet



Self closing sliding doors



SS304 Interior

## Technical specifications

Model	OTHELLO 100
Climate Class	N
Temperature Range, °C	1 to 8
Gross Volume, l	-
Net Volume, l	-
External Dimensions, WxDxH	1000x740x1276
Internal Dimensions, WxDxH	-
Doors	2 sliding glass
Shelves/Baskets	3 glass
Outer Body	Powder coated / SS304
Interior	SS304
Castors/Feet	4 adjustable feet
Lock	N
Voltage/Frequency, V/Hz	220-240/50
Input Power, W	497
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	285
Net Weight, kg	200
Noise Level dbA	42
Type of Cooling	Ventilated
Type of Defrost	Automatic
Controller	Digital
Thermometer	Y
Refrigerant	R134a
Charge, g	-
Internal Light	LED

# » Supermarket



## SUPER 185C Desk Cooler

- Sliding curved glass lids for easy access to products
- Adjustable dividers
- Adjustable shelves
- Adjustable legs
- Fan assisted cooling
- Electronic controller



False bottom for air circulation



Adjustable dividers/shelves



Fresh meat version available, 0-2 °C





### SUPER 210C Desk Cooler

- Sliding curved glass lids for easy access to products
- Adjustable dividers
- Adjustable shelves
- Adjustable legs
- Fan assisted cooling
- Electronic controller

## Technical specifications

Model	SUPER 185C	SUPER 210C	SUPER 250C
Climate Class	N	N	N
Temperature Range, °C	2 to 10	2 to 10	2 to 10
Gross Volume, l	789	912	1108
Net Volume, l	689	797	970
External Dimensions, WxDxH	1858x858x890	2108x858x890	2508x858x890
Internal Dimensions, WxDxH	1720x720x602	1970x720x602	2370x720x602
Doors	2 curved sliding glass lids	2 curved sliding glass lids	2 curved sliding glass lids
Shelves/Dividers	4/3	5/4	6/5
Outer Body	White	White	White
Interior	Stucco aluminium	Stucco aluminium	Stucco aluminium
Castors/Feet	6 legs, wheels as option	6 legs, wheels as option	6 legs, wheels as option
Lock	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	570	680	680
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	126	143	166
Net Weight, kg	110	125	145
Noise Level dbA	49	49	49
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Manual	Manual	Manual
Controller	Electronic	Electronic	Electronic
Thermometer	Digital	Digital	Digital
Refrigerant	R404a	R404a	R404a
Charge, g	200	250	250
Internal Light	LED as option	LED as option	LED as option

# » Supermarket



## SUPER 185F Desk Freezer

- Sliding curved glass lids for easy access to products
- Adjustable legs
- Electronic controller



Heated frame with smooth sliding lids



Curved VALENTINI glass



### SUPER 210F Desk Freezer

- Sliding curved glass lids for easy access to products
- Adjustable legs
- Electronic controller

## Technical specifications

Model	SUPER 185F	SUPER 210F	SUPER 250F
Climate Class	N	N	N
Temperature Range, °C	-12 to -24	-12 to -24	-12 to -24
Gross Volume, l	789	912	1108
Net Volume, l	689	797	970
External Dimensions, WxDxH	1858x858x890	2108x858x890	2508x858x890
Internal Dimensions, WxDxH	1720x720x602	1970x720x602	2370x720x602
Doors	2 curved sliding glass lids	2 curved sliding glass lids	2 curved sliding glass lids
Shelves/Dividers	-	-	-
Outer Body	White	White	White
Interior	Stucco aluminium	Stucco aluminium	Stucco aluminium
Castors/Feet	6 legs, wheels as option	6 legs, wheels as option	6 legs, wheels as option
Lock	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	500	620	620
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	126	143	166
Net Weight, kg	110	125	145
Noise Level dbA	49	49	49
Type of Cooling	Static	Static	Static
Type of Defrost	Manual	Manual	Manual
Controller	Electronic	Electronic	Electronic
Thermometer	Digital	Digital	Digital
Refrigerant	R404a	R404a	R404a
Charge, g	200	250	250
Internal Light	LED as option	LED as option	LED as option

# » Supermarket

## Accessories SUPER-Series



### Bumper Bars and Socket

- Bumper bars for stand-alone and as kit for back-to-back installation
- Socket with diffuser for air-intake as kit

### Internal Light


- LED light for low energy consumption





### Back-to-Back Brackets

- Brackets for stable back-to-back installation

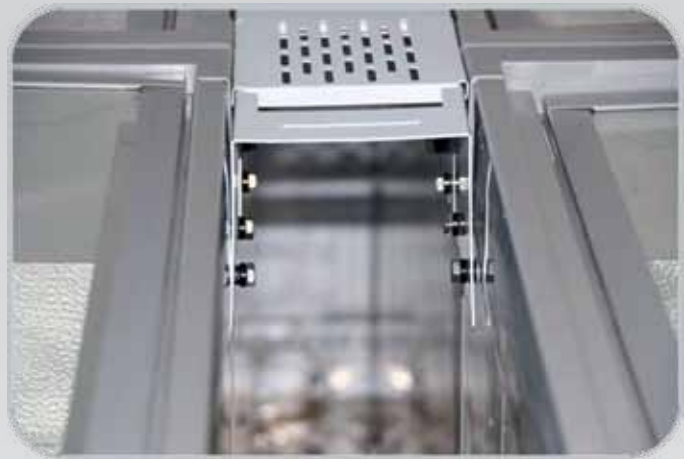

### Back-to-Back Ventilation

- Easy to fit ventilation covers for back-to-back installations



# » Supermarket




## UHD200

- Open top for easy access to products
- Internal horizontal light on two sides
- Glass sides for better presentation of products
- Ventilated cooling
- 2 bumper bars for protection of cabinet
- Wheels
- Thermometer
- Option: Night curtain



Adjustable shelves



Night curtain as option



2 thermostats for switching from cooler to freezer

#### UHD200-2

- 2 thermostats for switching from cooler to freezer
- Open top for easy access to products
- Internal horizontal light on two sides
- Glass sides for better presentation of products
- Ventilated cooling
- 2 bumper bars for protection of cabinet
- Wheels
- Thermometer
- Option: Night curtain

## Technical specifications

Model	UHD200	UHD200/2 THERMO
Climate Class	N	N
Temperature Range, °C	-2 to 5/-12 to -24	-2 to 5/-12 to -24
Gross Volume, l	200	200
Net Volume, l	165	165
External Dimensions, WxDxH	1010x1260x900	1010x1260x900
Internal Dimensions, WxDxH	705x1070x490	705x1070x490
Doors	Curtain as option	Curtain as option
Shelves/Baskets	3, wire	3, wire
Outer Body	RAL9016	RAL9016
Interior	Coated steel	Coated steel
Castors/Feet	4 wheels	4 wheels
Lock	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50
Input Power, W	850	850
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	142	142
Net Weight, kg	132	132
Noise Level dbA	49	49
Type of Cooling	Ventilated	Ventilated
Type of Defrost	Automatic	Automatic
Controller	Digital	Digital
Thermometer	Y	Y
Refrigerant	R404a	R404a
Charge, g	600	600
Internal Light	2x30W Neon	2x30W Neon
Canopy Light	N	N

# Laboratory

Tefcold Laboratory Range is designed for storing critical materials that demand constant temperature and security. We offer upright cabinets as well as chest freezers to accommodate a wide variety of storage needs. Last but not least we offer freezers with ultra-low temperatures.





21 °C



## » Laboratory Cabinets



### BTFF370

- Spark resistant
- Static cooling
- 7 fixed freezing shelves
- Electronic thermostat
- Alarm
- Battery backup



#### BTKF380

- Spark resistant
- 2 doors
- Static cooling
- 3 Adjustable shelves in fridge
- 3 door shelves
- 4 fixed freezing shelves in freezer
- Automatic defrost in fridge
- Electronic thermostat
- Alarm
- Battery backup



#### BTKK400

- Spark resistant
- Static cooling
- 6 Adjustable shelves
- 5 door shelves
- Automatic defrost
- Electronic thermostat
- Alarm
- Battery backup

## Technical specifications

Model	BTFF370	BTKF380	BTKK400
Climate Class	N	N	N
Temperature Range, °C	-5 to -24	2 to 12 / -5 to -24	2 to 12
Gross Volume, l	370	380	400
Net Volume, l	335	194/156	395
External Dimensions, WxDxH	595x640x1850	595x640x1850	595x640x1850
Internal Dimensions, WxDxH	480x420x1474	495x472x756	530x530x1558
Doors	1 solid	2 solid	1 solid
Shelves/Baskets	6	5, 3 door shelves	6, 5 door shelves
Outer Body	White	White	White
Interior	ABS	ABS	ABS
Castors/Feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet
Lock	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	-	-	-
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	66	76	67
Net Weight, kg	63	73	64
Noise Level dbA	-	-	-
Type of Cooling	Static	Static	Static
Type of Defrost	Manual	Manual	Automatic
Controller	Electronic	Electronic	Electronic
Thermometer	Y	Y	Y
Refrigerant	R600a	R600a	R600a
Charge, g	80	32/53	45
Internal Light	N	N	N
Canopy Light	N	N	N

## » Laboratory freezers



### SE40-45

- Low-Temperature -45
- Fast and high freezing capacity
- Strong handle with lock
- 1 baskets included
- Electronic thermostat with alarm
- 4 castors, 2 with brake
- Defrost water drain



**SE20-45**

- Low-Temperature -45
- Fast and high freezing capacity
- 1 baskets included
- Electronic thermostat with alarm
- 4 castors, 2 with brake
- Defrost water drain



**SE30-45**

- Low-Temperature -45
- Fast and high freezing capacity
- 1 baskets included
- Electronic thermostat with alarm
- 4 castors, 2 with brake
- Defrost water drain

## Technical specifications

Model	SE10-45	SE20-45	SE30-45	SE40-45
Climate Class	(25°C)	(25°C)	(25°C)	(25°C)
Temperature Range, °C	-5 to -45	-5 to -45	-5 to -45	-5 to -45
Gross Volume, l	155	235	330	400
Net Volume, l	152	230	323	392
External Dimensions, WxDxH	734x705x945	984x705x945	1284x705x945	1504x705x945
Internal Dimensions, WxDxH	570x440x705	820x440x705	1120x440x705	1340x440x705
Doors	1 solid	1 solid	1 solid	1 solid
Shelves/Baskets	1	1	1	1
Outer Body	White	White	White	White
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake
Lock	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	180	180	225	245
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	48	53	63	71
Net Weight, kg	45,5	51	61	68
Noise Level dbA	45	45	45	45
Type of Cooling	Static	Static	Static	Static
Type of Defrost	Manual	Manual	Manual	Manual
Controller	Electronic	Electronic	Electronic	Electronic
Thermometer	Y	Y	Y	Y
Refrigerant	R404a	R404a	R404a	R404a
Charge, g	90	145	155	270
Internal Light	N	N	N	N
Canopy Light	N	N	N	N

# » Laboratory freezer



## SE30-60

- Low-Temperature -60
- Fast and high freezing capacity
- Strong handle with lock
- 1 baskets included
- Electronic thermostat with alarm
- 4 castors, 2 with brake
- Defrost water drain



**SE40-60**

- Low-Temperature -60
- Fast and high freezing capacity
- Strong handle with lock
- 1 baskets included
- Electronic thermostat with alarm
- 4 castors, 2 with brake
- Defrost water drain




**SE4782-55**

- Low-Temperature -55
- Fast and high freezing capacity
- Strong handle with lock
- 5 baskets included
- Electronic thermostat with alarm
- 4 castors, 2 with brake
- Defrost water drain

## Technical specifications

Model	SE30-60	SE40-60	SE4782-55
Climate Class	(25°C)	(25°C)	(25°C)
Temperature Range, °C	-5 to -60	-5 to -60	-5 to -55
Gross Volume, l	332	412	462
Net Volume, l	325	405	441
External Dimensions, WxDxH	1504x705x895	1804x705x895	1650x750x905
Internal Dimensions, WxDxH	1300x400x665	1600x400x665	1445x500x650
Doors	1 solid	1 solid	1 solid
Shelves/Baskets	1	1	5
Outer Body	White	White	White
Interior	Stucco Aluminium	Stucco Aluminium	Coated steel
Castors/Feet	2 with, 2 without brake	2 with, 2 without brake	2 with, 2 without brake
Lock	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	-	-	720
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	83	91	88
Net Weight, kg	80	88	80
Noise Level dbA	45	45	46
Type of Cooling	Static	Static	Static
Type of Defrost	Manual	Manual	Manual
Controller	Electronic	Electronic	Electronic
Thermometer	Y	Y	Y
Refrigerant	-	-	-
Charge, g	-	-	-
Internal Light	N	N	N
Canopy Light	-	-	N

# » Gastronorm Pans

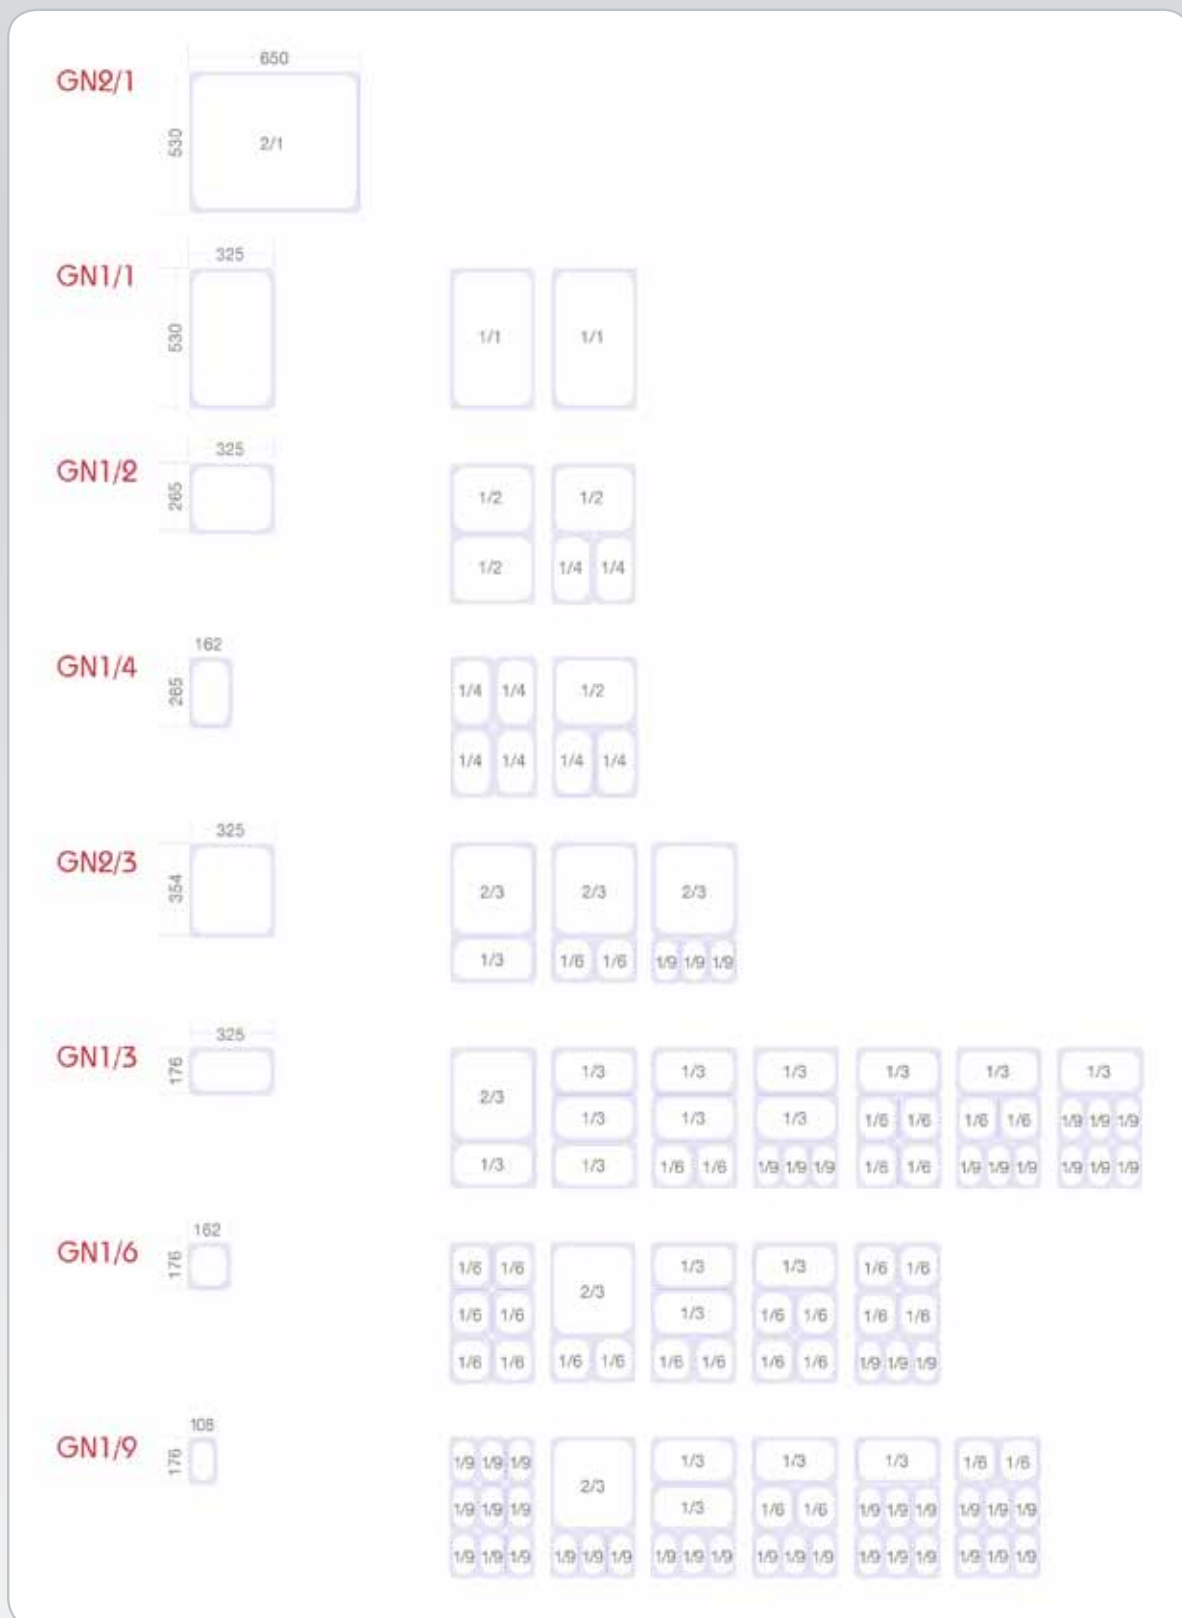



# » News 2012



GBC-Models, page 20



FS1450, page 23



FSC1000S-FSC1200S, page 30



FSC1000H-FSC1200H, page 32




TLB150, page 46



BA10UF Glassfroster, page 56



BA20SS, page 57



TFW365-2 and TFW375 Series, page 76-79



CPV28, page 80



NIC100, page 94



PIA-Models, page 106



DD420, page 110



NF5000G, page 122



UR550-UF550, page 148



Othello100, page 182



Tefcold A/S | P.O.Box 84 | Klokkestøbervej 12 | DK-8800 Viborg | Denmark | Phone +45 86 60 19 33 | Fax +45 86 60 17 33 | [info@tefcold.dk](mailto:info@tefcold.dk)

[www.tefcold.dk](http://www.tefcold.dk)